




2

0



8

“ ”
“ ”
“ ”

A

”

—

12

12

12

12

12

—

—

1

RG-S5750
S5750

S5750

QoS

S5750

M P ;
 P H W N
 P
 S S M H M B
 A A
 M P
 M
 QoS
 D Q B P B W

	S5750-24GT/12SFP S5750S-24GT/12SFP S5750P-24GT/12SFP				
	24	10/100/1000M	12	SFP	2
	FE-SFP-LX-MM1310		100BASE-FX E		LC
	S5750-24GT/12SFP V2.XX				
	FE-SFP-LH15-SM1310		100BASE-FX E		LC
	S5750-24GT/12SFP V2.XX				
	Mini-GBIC-SX		1000BASE-SX mini GBIC		LC
	Mini-GBIC-LX		1000BASE-LX mini GBIC		LC
	Mini-GBIC-ZX50		1000BASE-ZX mini GBIC		LC 50km
	Mini-GBIC-ZX80		1000BASE-ZX mini GBIC		LC 80km
	M5700-01XENPAK 1		XENPAK		
	M5700-01XFP 1		XFP		
	M5700-STACK				
			300		M5700-01XENPAK
	LR		10		M5700-01XENPAK
	ER		40		M5700-01XENPAK
	SR		300		M5700-01XFP
LR		10		M5700-01XFP	
ER		40		M5700-01XFP	
	L2	66Mpps			
	L3	66Mpps			
8	S5750P				9
802.1q VLAN	4K				
ACL	IP ACL IP ACL IP ACL IP TCP/UDP ACL MAC ACL MAC MAC ACL ACL ACL VLAN MAC IP TCP/UDP ACL				
L2	IEEE802.3 IEEE802.3u IEEE802.3z IEEE802.3x IEEE802.3ae IEEE802.3ak IEEE802.3ad IEEE802.1p IEEE802.1x IEEE802.3ab IEEE802.1Q (GVRP) IEEE802.1d IEEE802.1w IEEE802.1s IGMP Snooping v1/v2/v3 LLDP				
Defeat DoS Attack					
Defeat IP Scan					
L3	OSPF ECMP/WCMP RIPv1/v2 PIM DM/SM/SSM DVMRP VRRP IGMPv1/v2/v3				
	SNMPv1/v2/v3 Web(JAVA) CLI(Telnet /Console) RMON(1,2,3,9) SSH SNMP Syslog				
	DHCP Relay DNS Client				
Jumbo Frame					
× ×	437 × 435 × 44mm				

	S5750 S5750S 8.5 kg S5750P 9kg
	S5750 S5750S 90-132V/176-264V AC 50/60Hz <3A (RPS) 10.6-13.2V DC <6.6A
	S5750P 100-240VAC 50-60Hz POE <0.7A POE <4.8A
	<54W, <70W S5750P PD <460W
	: -40℃ 70℃
	0%

5
9%
9%

2	2
	S5750-24SFP/12GT
	2 8 2 2 2
	FE-SFP-LX-MM1310 100BASE-FX E LC S5750-24SFP/12GT V2.XX FE-SFP-LH15-SM1310 100BASE-FX E LC S5750-24SFP/12GT V2.XX Mini-GBIC-SX 1000BASE-SX mini GBIC LC Mini-GBIC-LX 1000BASE-LX mini GBIC LC Mini-GBIC-ZX50 1000BASE-ZX mini GBIC LC 50km Mini-GBIC-ZX80 1000BASE-ZX mini GBIC LC 80km M5700-01XENPAK 1 XENPAK M5700-01XFP 1 XFP M5700-STACK 300 M5700-01XENPAK LR 10 M5700-01XENPAK ER 40 M5700-01XENPAK SR 300 M5700-01XFP LR 10 M5700-01XFP ER 40 M5700-01XFP

15



L2 IEEE802.3 IEEE802.3u IEEE802.3z IEEE802.3x IEEE802.3ae
IEEE802.3ak IEEE802.3ad IEEE802.1p IEEE802.1x IEEE802.3ab
IEEE802.1Q


ACL	IP ACL IP ACL IP ACL IP TCP/UDP ACL MAC ACL MAC MAC ACL ACL ACL VLAN MAC IP TCP/UDP ACL
L2	IEEE802.3 IEEE802.3u IEEE802.3z IEEE802.3x IEEE802.3ae IEEE802.3ak IEEE802.3ad IEEE802.1p IEEE802.1x IEEE802.3ab IEEE802.1Q (GVRP) IEEE802.1d IEEE802.1w IEEE802.1s IGMP Snooping v1/v2/v3 LLDP
Defeat DoS Attack	
Defeat IP Scan	
L3	OSPF ECMP/WCMP RIPv1/v2 PIM DM/SM/SSM DVMRP VRRP IGMPv1/v2/v3
	SNMPv1/v2/v3 Web(JAVA) CLI(Telnet /Console) RMON(1,2,3,9) SSH SNMP Syslog
	DHCP Relay DNS Client
Jumbo Frame	
× ×	437 × 420 × 44mm
	9kg
	90-132V/176-264V AC 50/60Hz <3A (RPS) 10.6-13.2V DC <6.6A
	<90W, <105W

: -40℃ 70℃


	FE-SFP-LX-MM1310	100BASE-FX E	LC	
		S5750P-48GT/4SFP V2.XX		
	FE-SFP-LH15-SM1310	100BASE-FX E	LC	
		S5750P-48GT/4SFP V2.XX		
	Mini-GBIC-SX	1000BASE-SX mini GBIC	LC	
	Mini-GBIC-LX	1000BASE-LX mini GBIC	LC	
	Mini-GBIC-ZX50	1000BASE-ZX mini GBIC	LC	50km
	Mini-GBIC-ZX80	1000BASE-ZX mini GBIC	LC	80km
	M5700-01XENPAK 1	XENPAK		
	M5700-01XFP 1	XFP		
	M5700-STACK			
		300	M5700-01XENPAK	
	LR	10	M5700-01XENPAK	
	ER	40	M5700-01XENPAK	
	SR	300	M5700-01XFP	
	LR	10	M5700-01XFP	
	ER	40	M5700-01XFP	
	L2	pps		

	PD	<105W
48	PD	<830W
48	PD	<845W
	: -40℃ 70℃	
	%	

3
9%
9%
5%

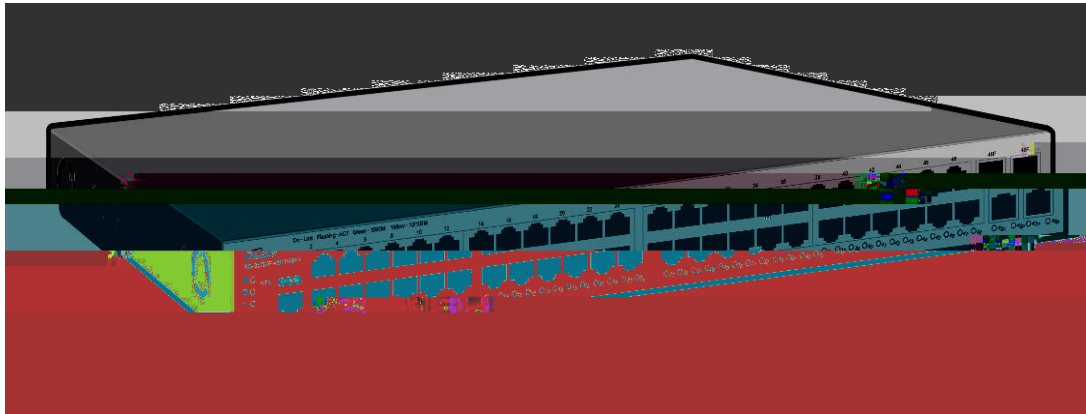

1-4 RG-S5750(S)-48GT/4SFP

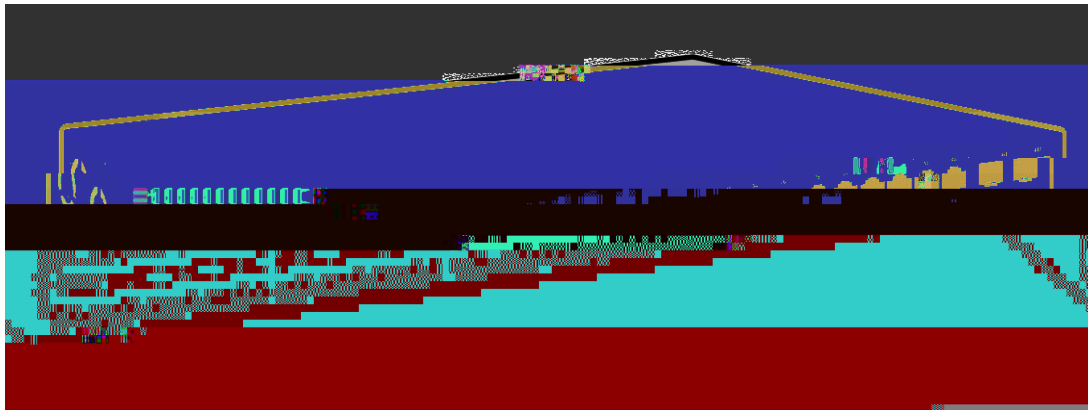

1-5 RG-S5750P-48GT/4SFP

1-5 LED

status	● S5750S - 1 ● S5750 - 2 ● S5750P-24 ● S5750-24SFP/12GT ● S5750P-48 - 3		
RPS	● S5750S ● S5750 ○ S5750P-24 ● S5750-24SFP ● S5750P-48		
MOD	○ S5750S ○ S5750 ● S5750P-24 ○ S5750-24SFP/12GT ● S5750P-48		LED POE
MOD-LED	○ S5750S ○ S5750 ● S5750P-24 ○ S5750-24SFP/12GT ● S5750P-48		MOD S5750P POE S5750P-48 POE

Xe	● S5750S ● S5750 ● S5750P-24 ● S5750-24SFP/12GT ● S5750P-48		Xe1 Xe2 Xe / Xe LINK/ACT
Console	● S5750S ● S5750 ● S5750P-24 ● S5750-24SFP/12GT ● S5750P-48		
RJ45	● S5750S ● S5750 ● S5750P-24 ● S5750-24SFP/12GT ● S5750P-48	10/100/1000M RJ45 LED	LED 1-5

4

S5750-48GT/4SFP

S5750S-48GT/4SFP

SFP

SFP

SFP

5/ 6

LED

POE

1-7

Xe1	1	5700-01XFP M5700-01XENPAK M5700-STACK
Xe2	2	Xe1
220VAC	220V	220V


F

220V 0i E 4 r M S5L ? F

D



1-5 M5700-01XFP

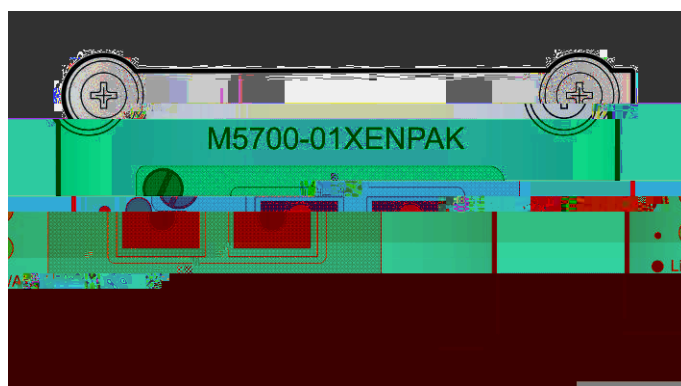

1-6 M5700-01XENPAK



1-7 M5700-STACK

500

Ø

5

6

2

‘ ,

“ ”
“ ”

2

4

“ ”
“ ”

40 °C

10cm

2


9

9


L

6 0

0

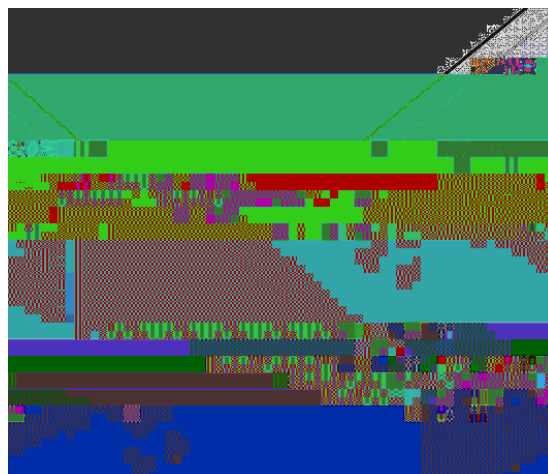

2

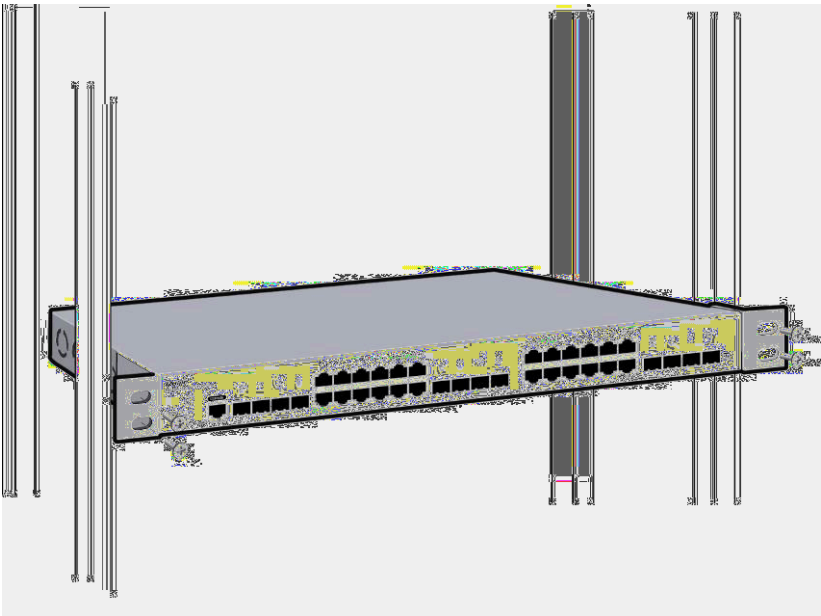

22

“ ”

2

2 R

	RJ-45		3	4	5		10Mbps	5
100/1000Mbps						/	RJ-45	
RJ-45	RJ-45		“	”				
“	”							
“	”	RJ-45						
		100						

2

RX TX

“ ” 100BASE-FX/1000BASE-SX/LX

2

R

“ ”

3

а		

В

0

и

у 0

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.

L

$\mathbb{V}$

A

$\mathbb{X}$

$\mathbb{R}$

