





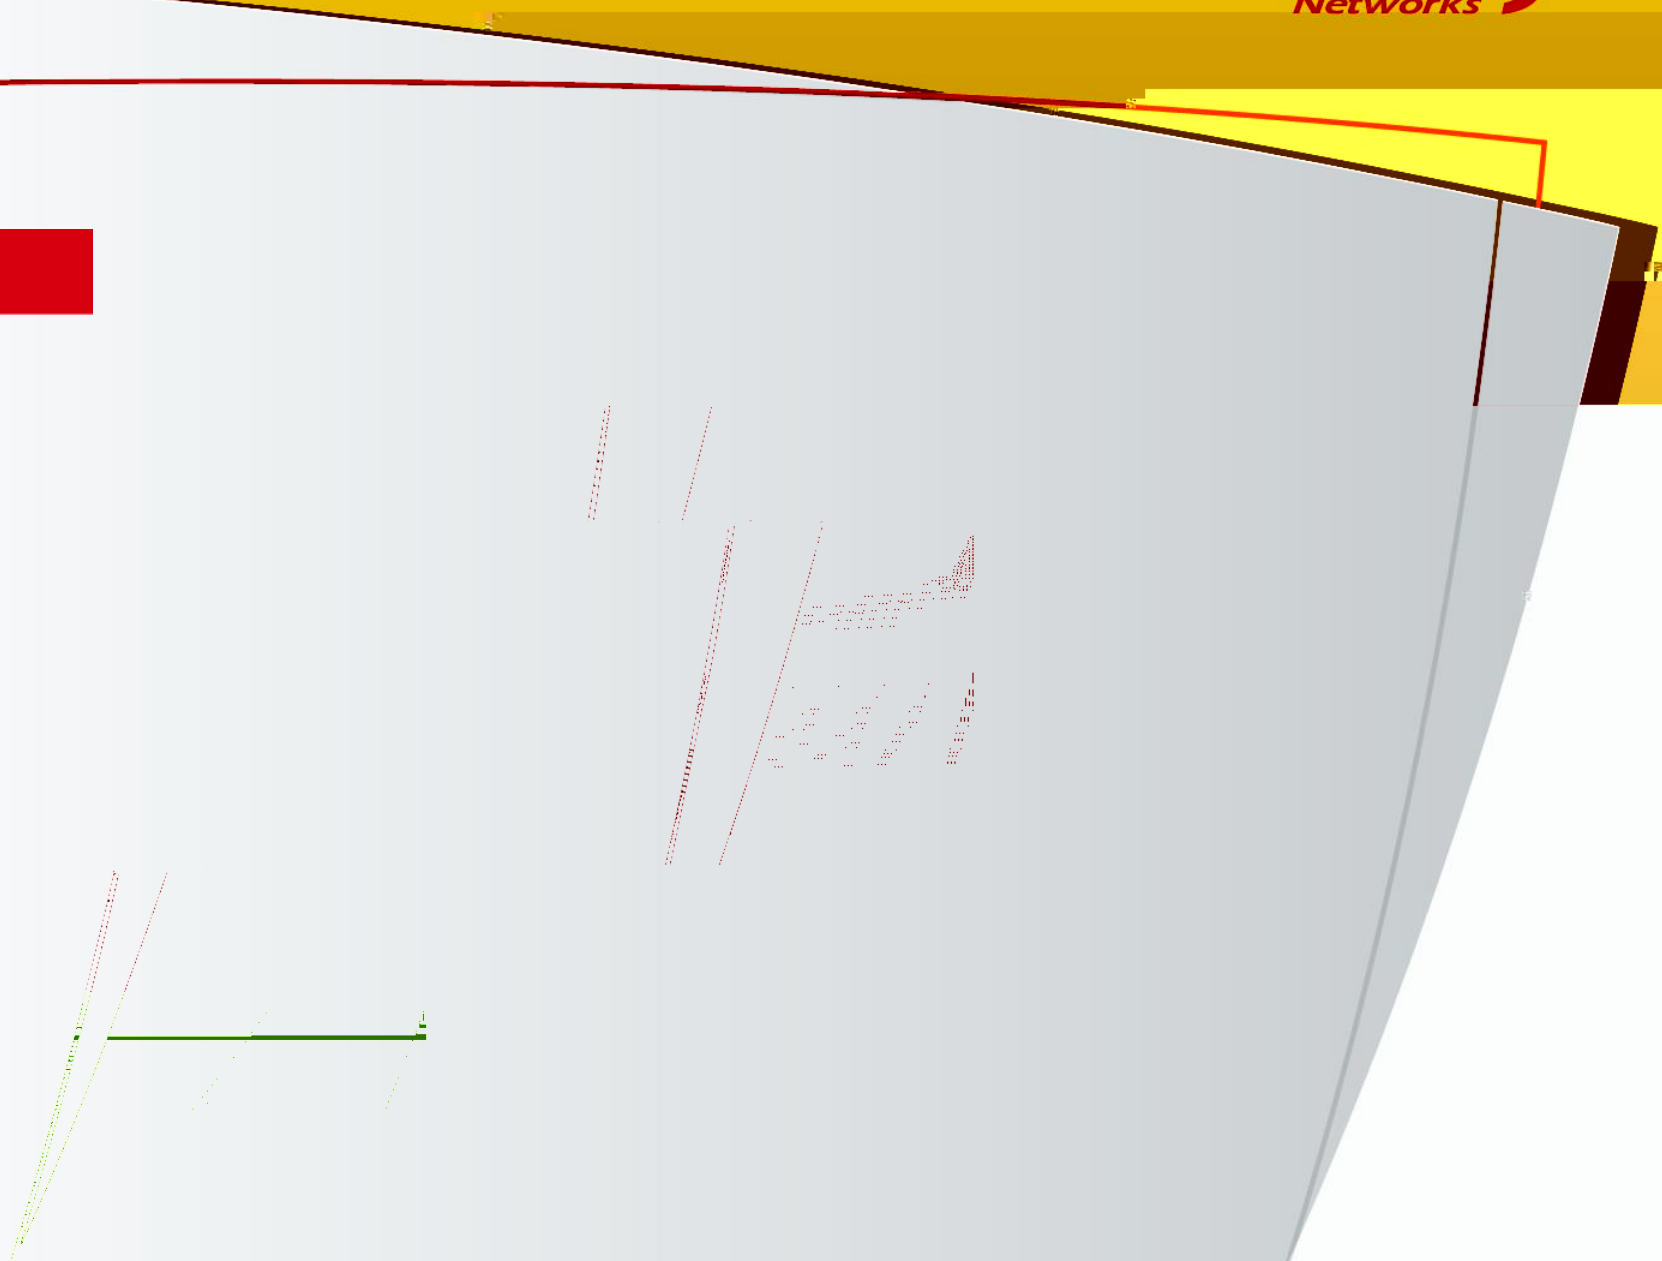

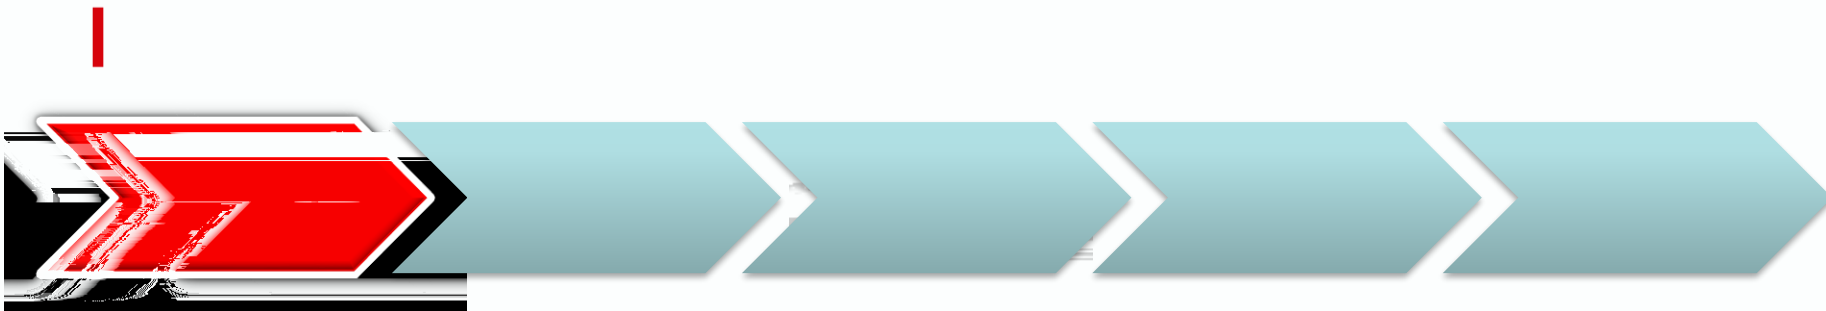

RG-IS2708M-4P

-40 ~70

5%~95%

10cm

I



OT

OT






M16




I

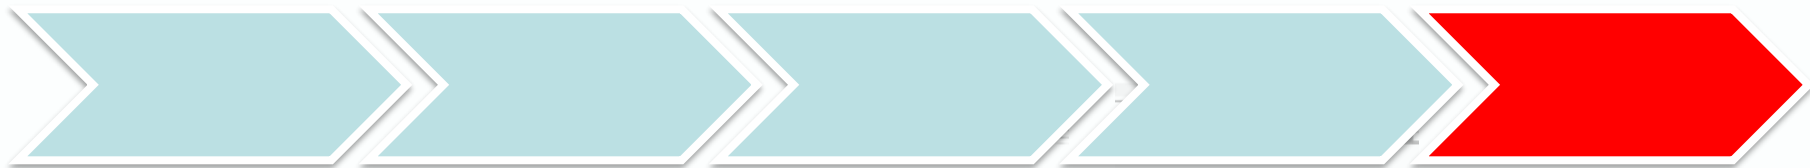

10CM

M12

M12

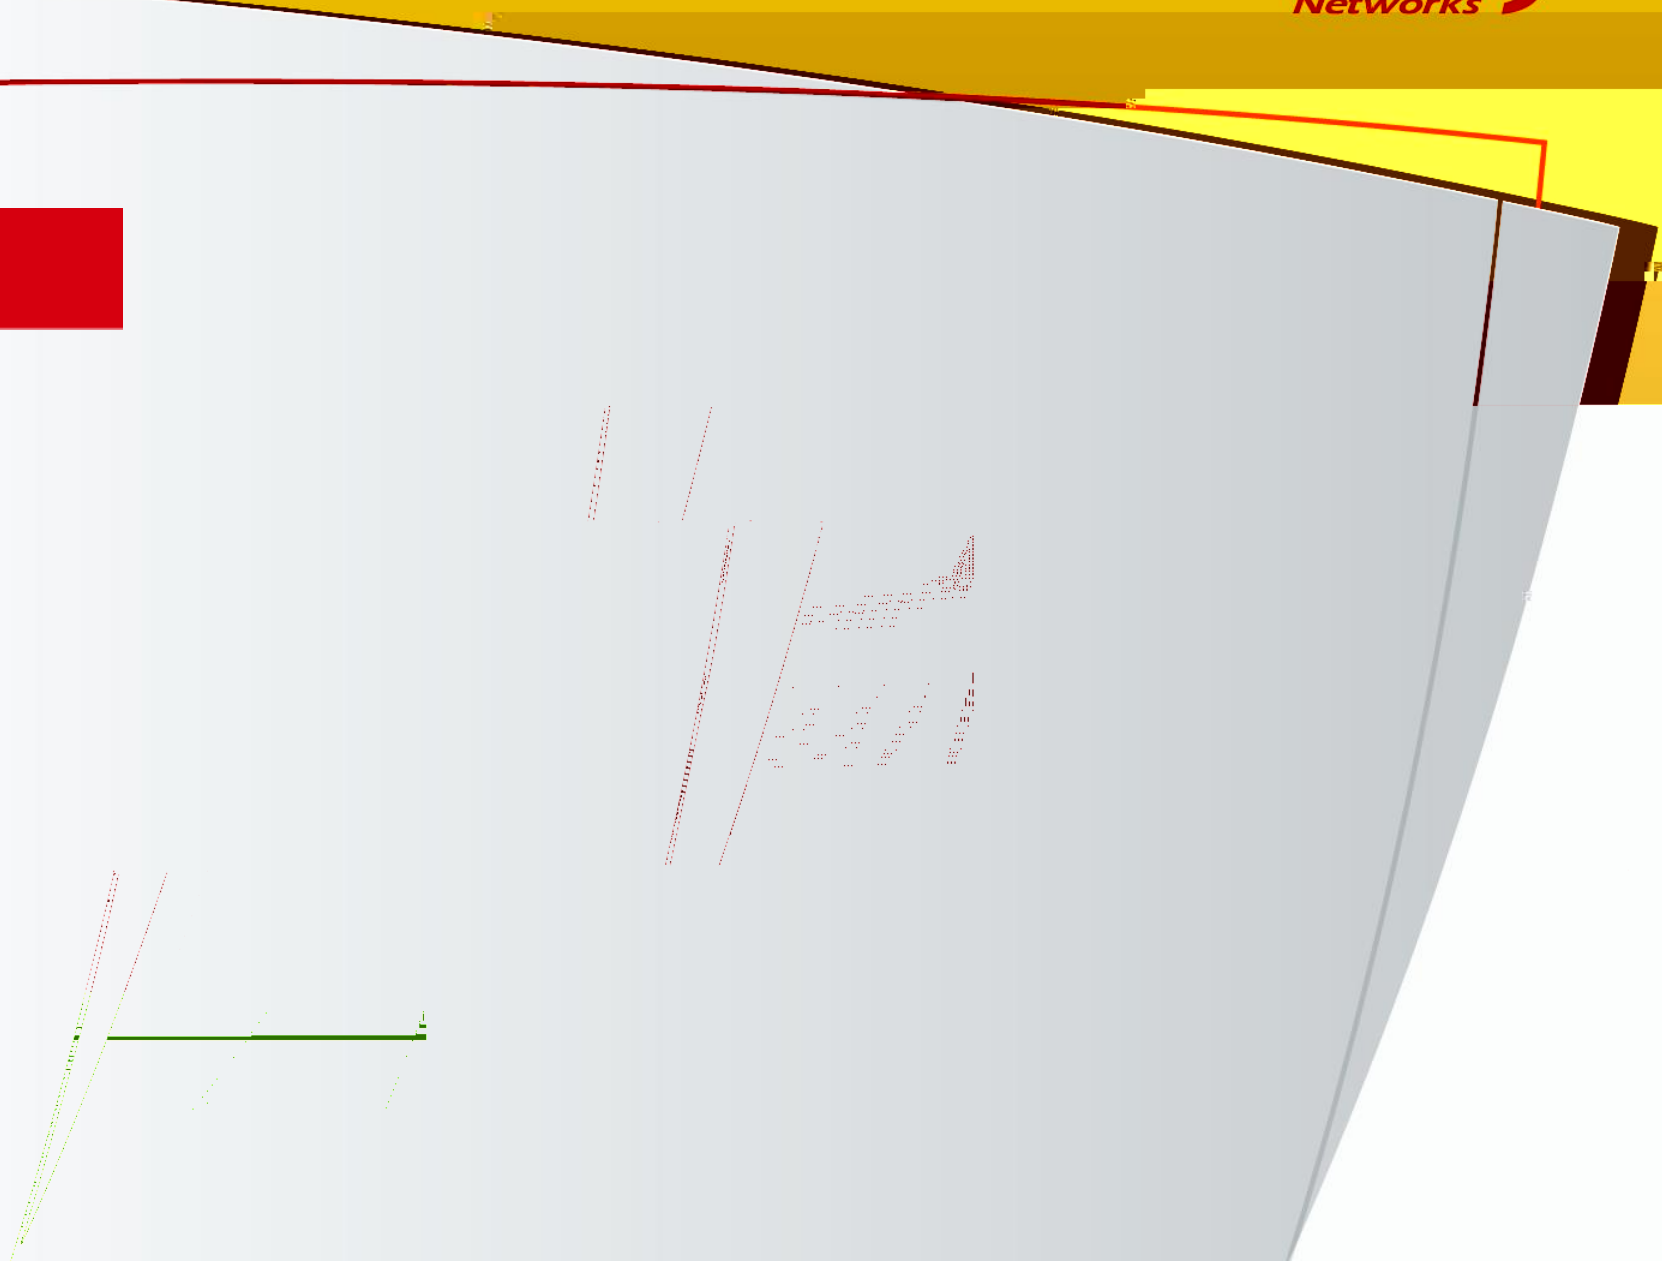

I




Console
Console
COM

1 DB-9

M12

9

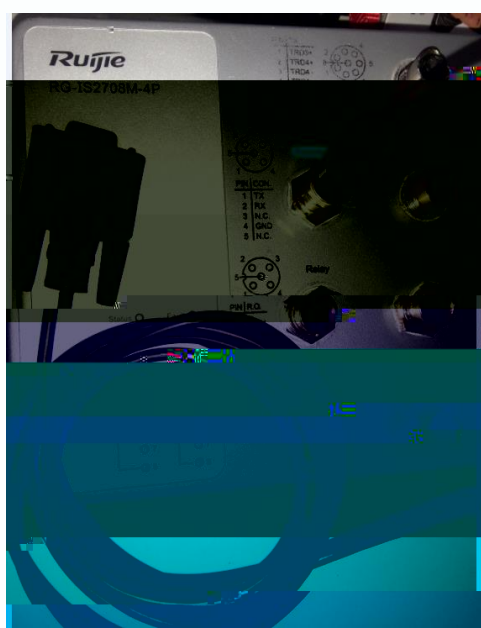

Console

PC


CRT

```
System bootstrap ...  
Nor Flash ID: 0x017E1000, SIZE: 8388608Bytes  
Press Ctrl+B to enter Boot Menu .....  
Load Ctrl Program ...  
  
Executing program, launch at: 0x00010000  
Load Ctrl Program ...  
  
Self decompressing the image :  
*****
```


3-4

*Jan 24 10:17:10: %DEVICE-5-CHANGED: Device SXXXX changed state to up.
Ruijie>*Jan 28 10:20:12: %SYS-5-COLDSTART: System coldstart.


I

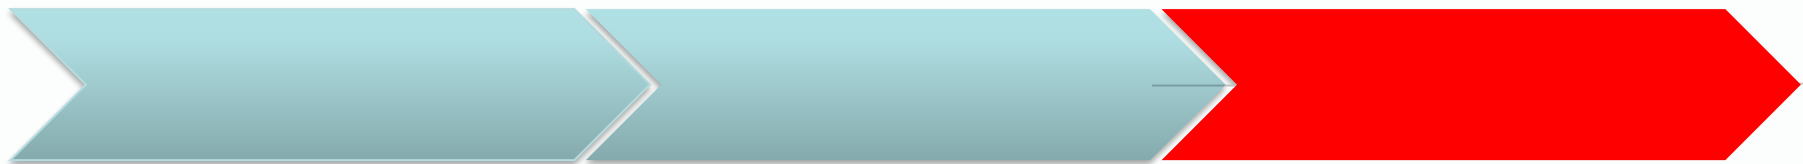


Ruijie> CLI
// :

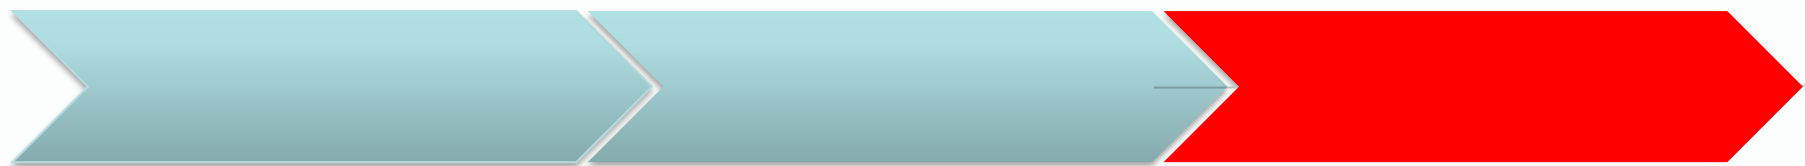

CLI

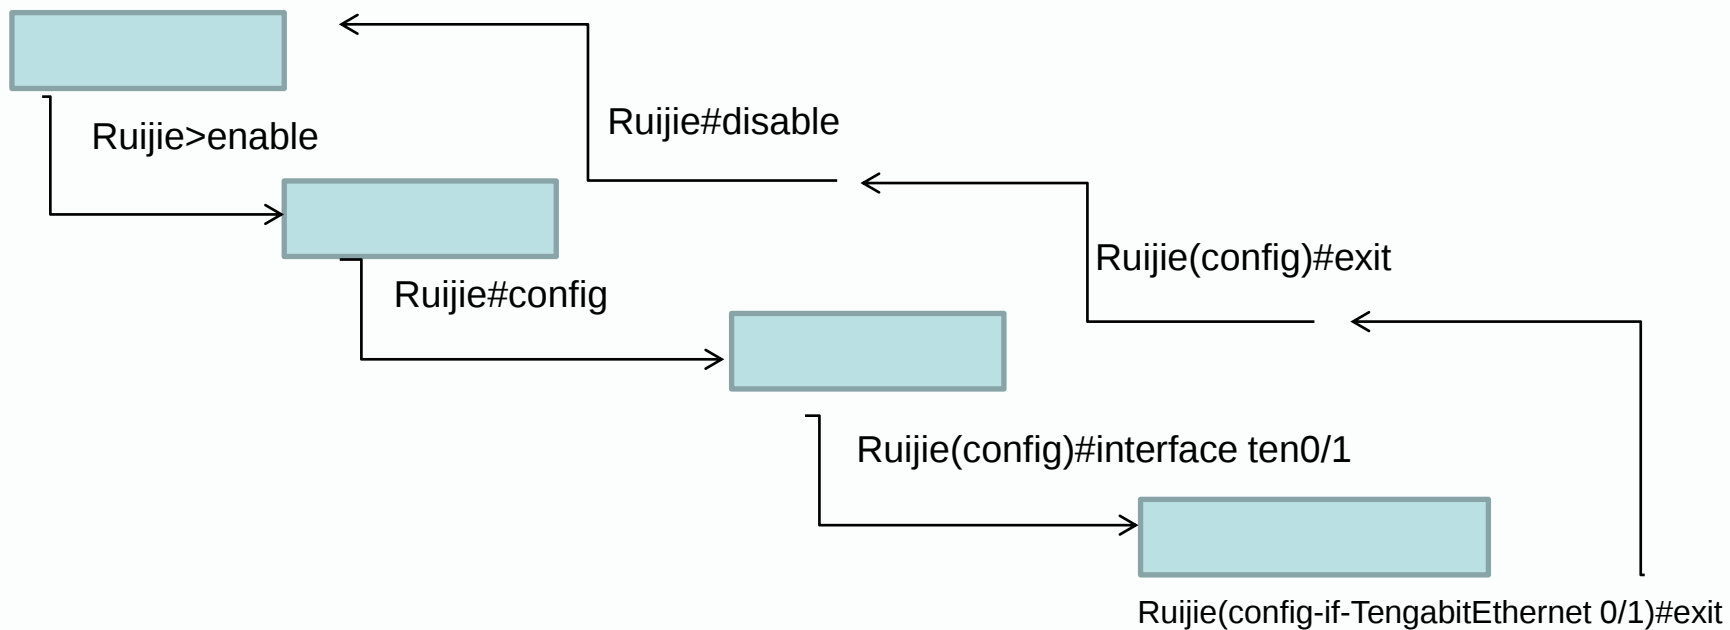


I

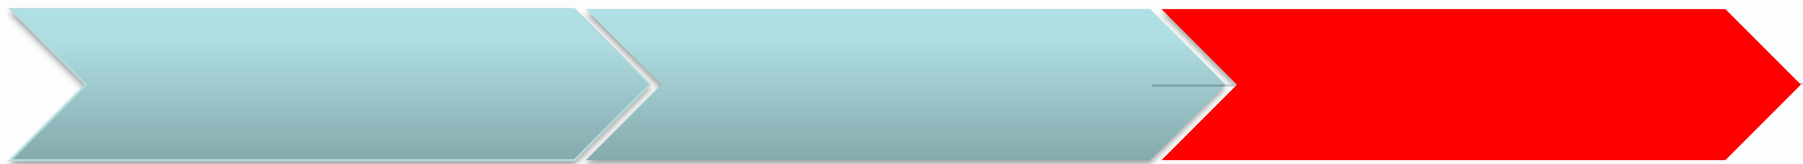


□

1

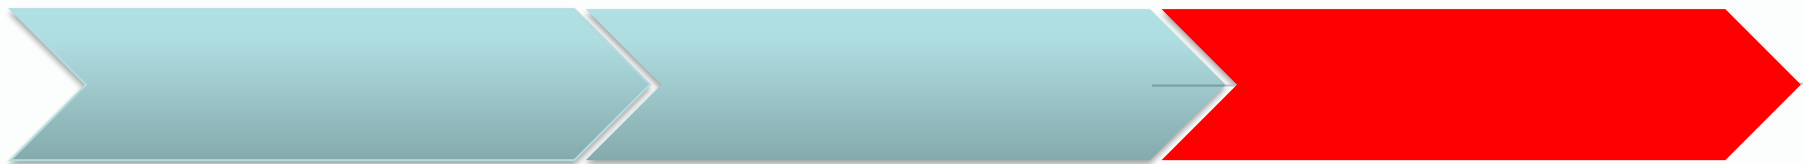

Telnet

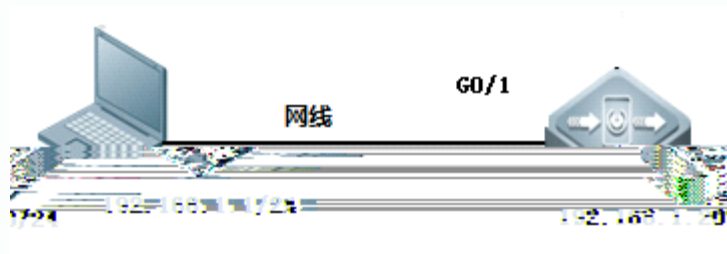

2.


```
C:\ Telnet 192.168.1.200

User Access Verification

Password:

Ruijie>en

Password:
n . . . .
```

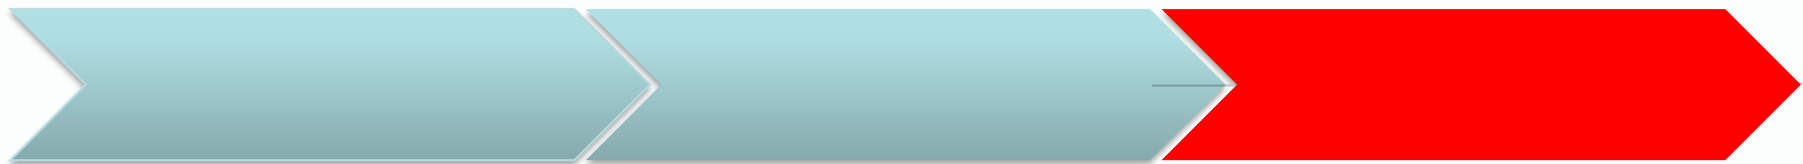

Web

