



I




I



RG-S29G-E V3




19

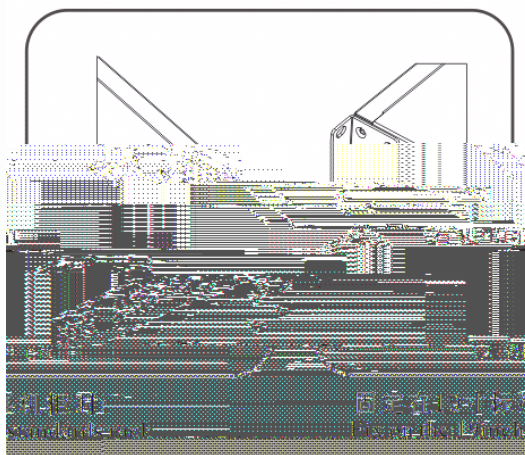




(
4

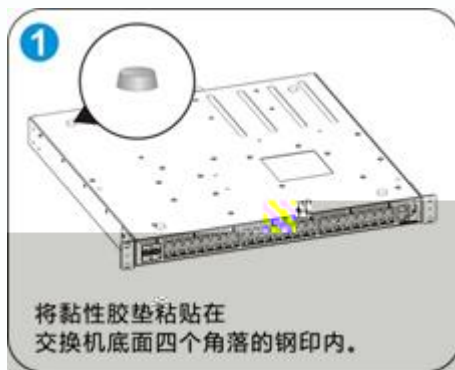

I

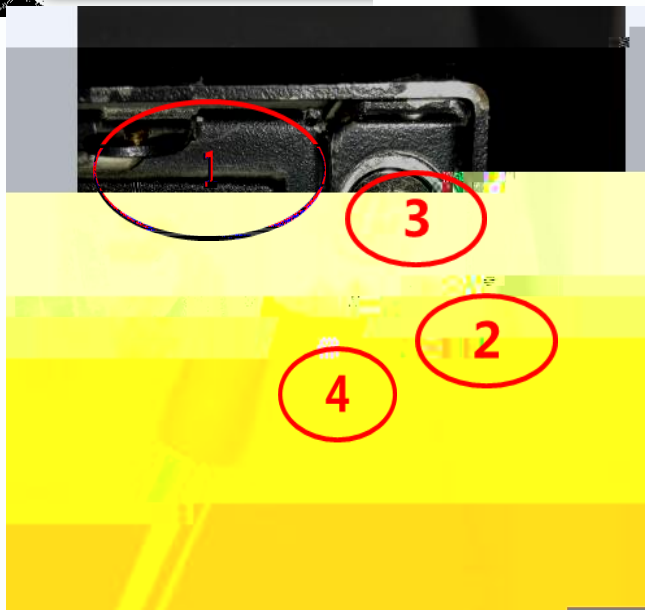

OT

OT

PE

PE

1	
2	
3	OT
4	







1 Console

2 Telnet/SSH

CLI

3 SNMP


CLI

4 WEB

WEB

admin/admin

| Console

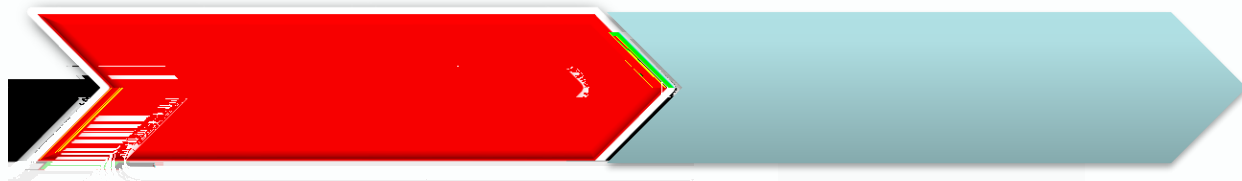

| Console



Console

CRT

```
Boot 1.2.9-5bb0801 (build time: Sep 25 2014 - 10:26:15)
DRAM: 1 GiB
NAND: 512 MiB
Flash: 8 MiB
SETPMAC: Setmac operation was performed at 2014-09-09 11:08:47 (version: 1.1.0)
...
Boot loader: u-boot
```

3

Press RETURN to get started

```
*Nov 27 17:30:10: %DP-6-POWER_OK: Power 2 ok.
~ # *Nov 27 17:30:14: %DP-5-PROB: Board probing has completed.
*Nov 27 17:30:14: %DEV_MONITOR-6-DEVICE_INIT: master role init.
*Nov 27 17:30:15: %REDUNDANCY-6-STATES_CHANGE: Redundancy states changed: role master, state alone.
*Nov 27 17:30:15: %RG_SYSMON-5-WARMSTART: System warmstart...
...
Press RETURN to get started...
ruijie>
```

" Enter"

CLI
VSU


6min

VSU

VSU

VSU

| Console

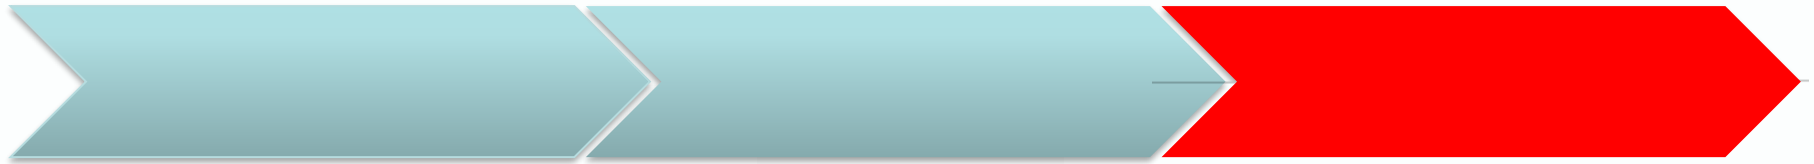

Console

CLI

Telnet/SSH

CLI

CLI

Ruijie> // :

Ruijie>en

Ruijie# //

Ruijie#config

Enter configuration commands, one per line. End with CNTL/Z.


Ruijie(config)# //

?

Console



CLI

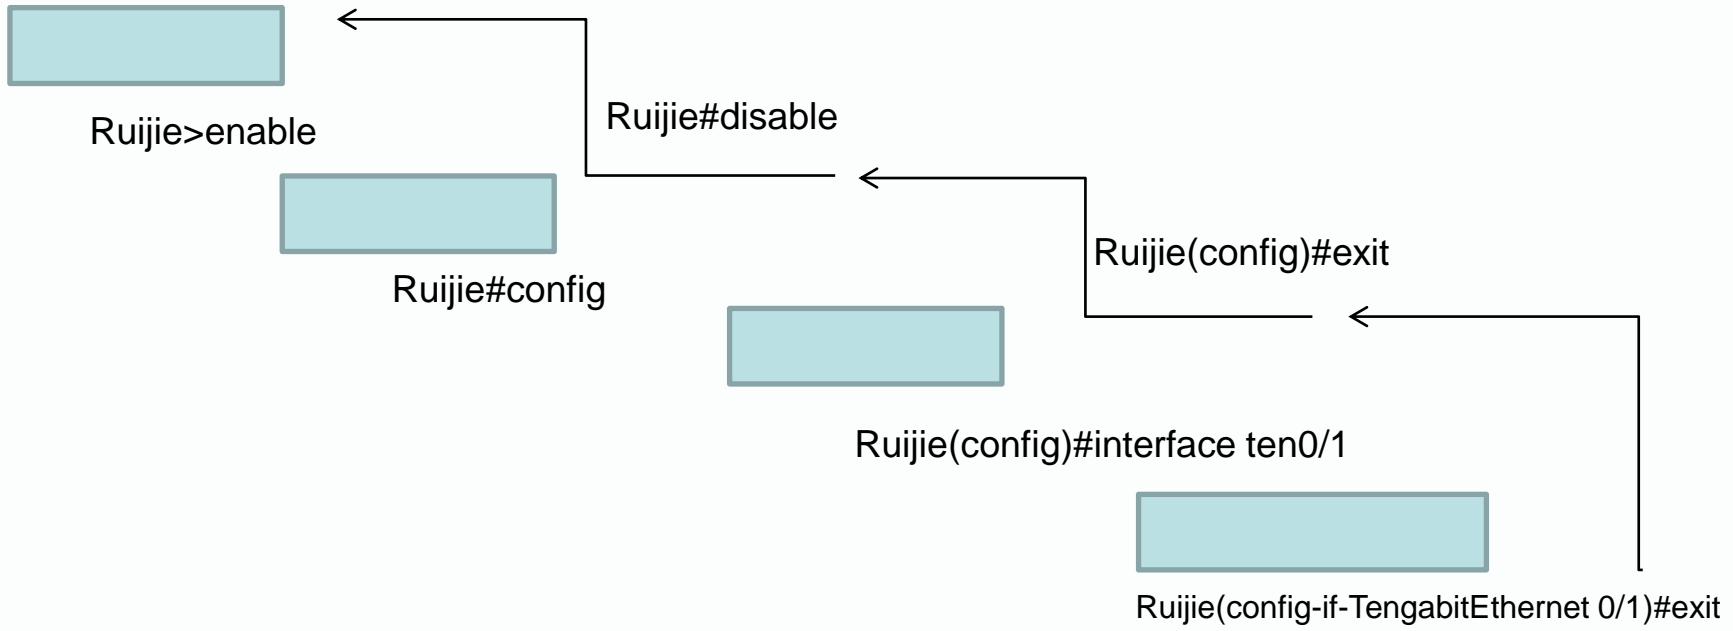

Console



11.X CLI

10.X

CLI

```
Ruijie#show version /show version slots / show cpu /show memory /show interface status /show ip route /show arp /show fan / show power /show temperature....
```

```
Ruijie#show run //
```

```
Ruijie(config-if-GigabitEthernet 1/1)#show this //
```

```
Ruijie#wr //
```

```
Ruijie#ping 8.8.8.8 // Ping
```

```
Ruijie#traceroute 8.8.8.8 // traceroute
```

```
Ruijie#telnet 192.168.3.254 // telnet
```

```
Ruijie#debug ip icmp //
```




Telnet



Telnet



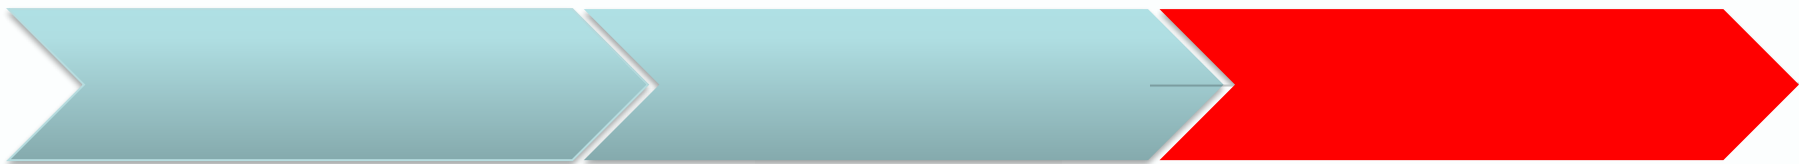

RG-S29
RG-S29

RGOS 11.4(1)B12
RGOS 11.4(1)B12

.pdf
.pdf

S6220
11.X

10.X


S12000

S8600

S29G-E V3

S5750




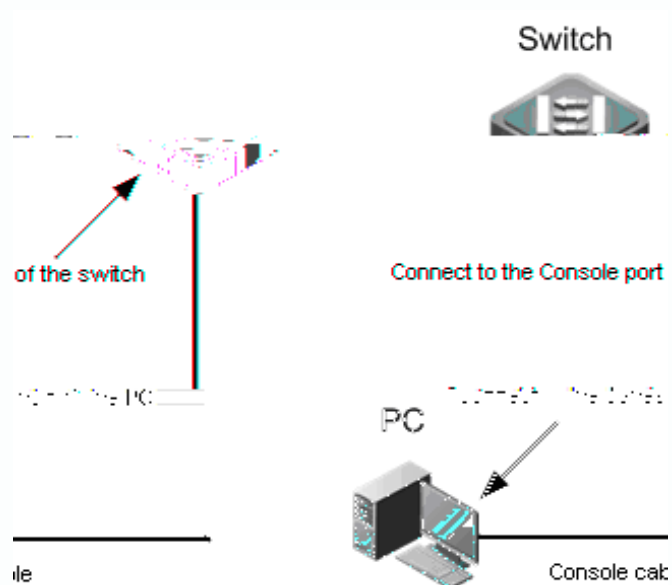

- 1 TFTP
 - 2 UBOOT
- PPT

- 1
- 2 bug
- 3

TFTP

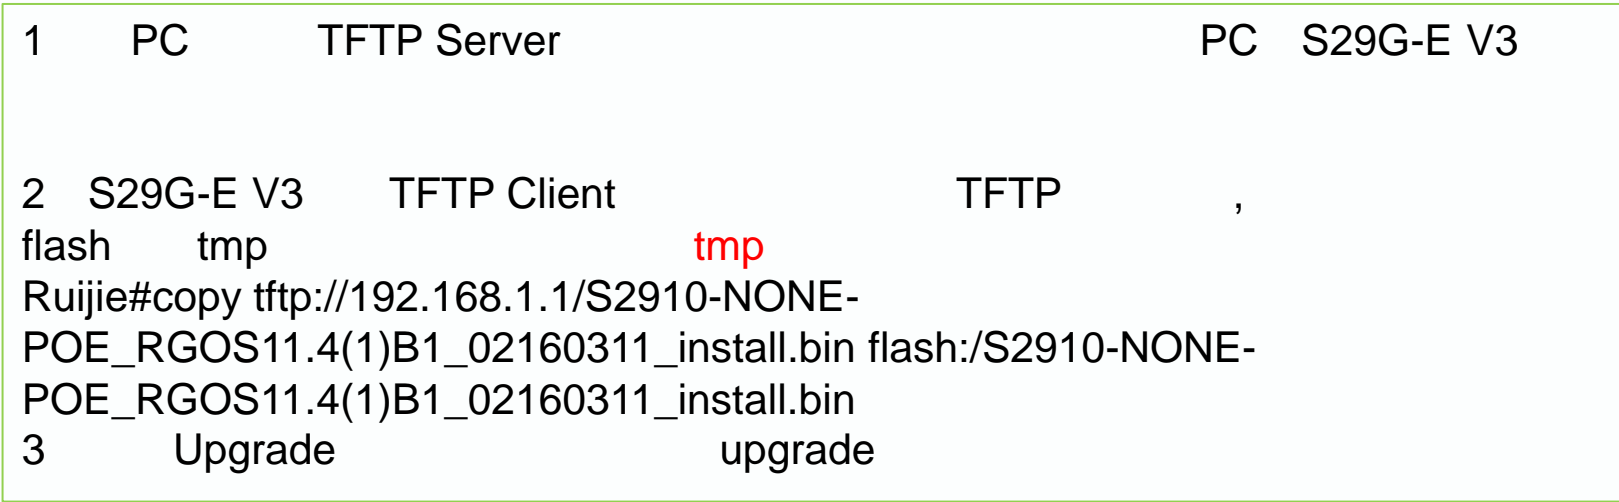

TFTP

TFTP

- www.ruijie.com.cn
- www.ruijie.com.cn/service.aspx
- support.ruijie.com.cn

- webchat.ruijie.com.cn
- 4008-111-000