



RG-WALL 1600-Z

RG-WALL 1600-Z



- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.



/

SYS

管理员

设备信息

管理员

管理员角色

系统配置

系统时间

运行时长

SN码

版本信息

NTOS 1.0R1, Release(02131312)

运行 4 小时, 53 分钟

设备参数

H1QP2F000142

NGFW

快速入门

安全报

最新攻

2022-0

2022-0

2022-0

2022-0

2022-0

2022-0

设备检测

设备云

策略和升级


系统维护

设备信息

配置备份

系统升级

已激活 4 项 查看详情

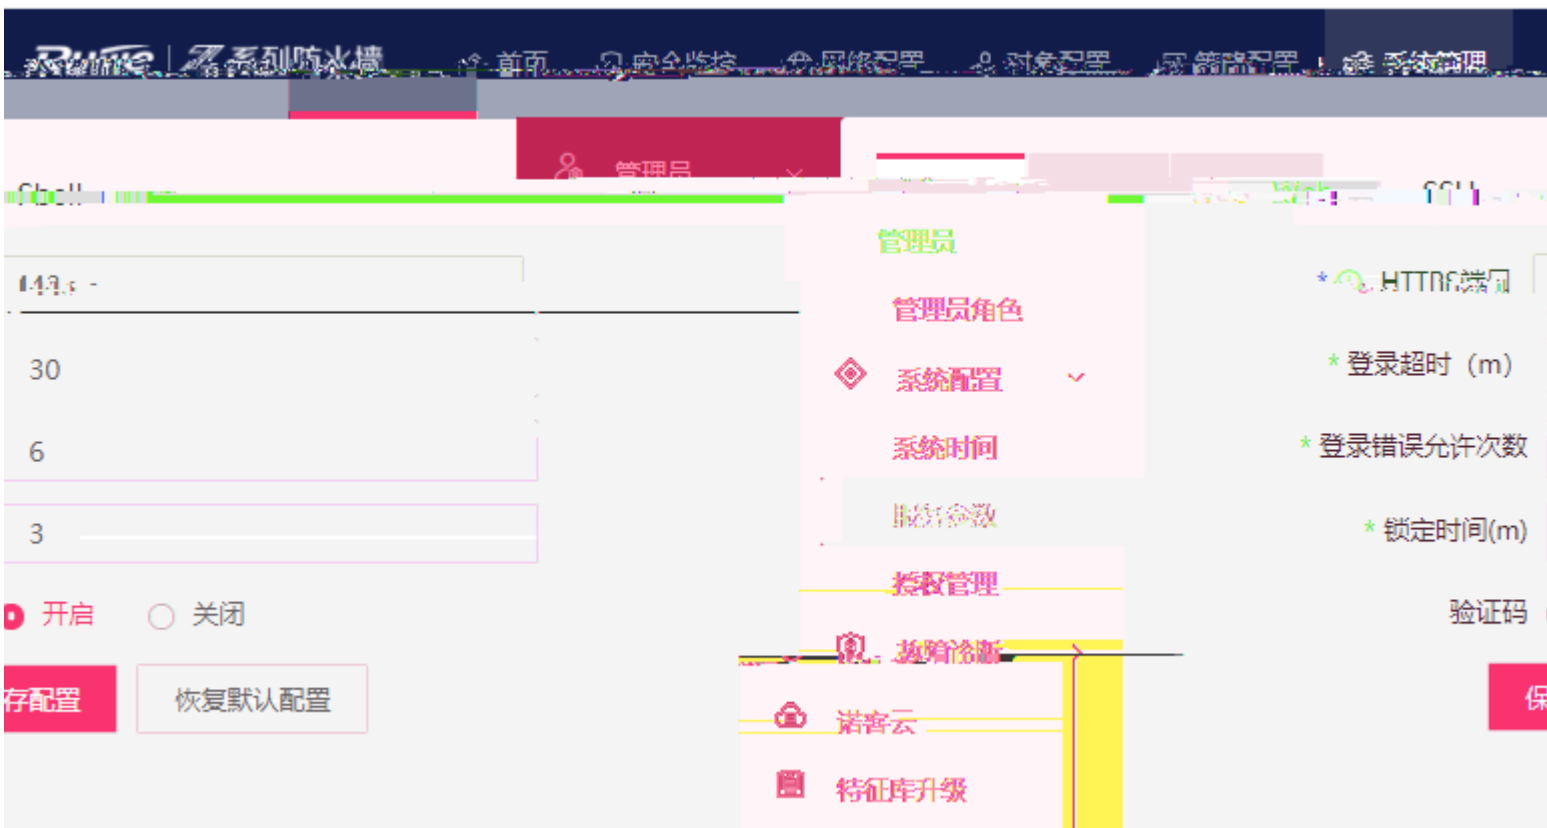

管理员

管理员

管理员角色

系统配置

系统时间

服务参数

授权管理

故障诊断

诺客云

系统维护

系统时间

系统时间设置

* 日期 2022-01-13

* 时间 23:48:47

* 时区 (UTC+08:00) 上海, 北京,

同步设置

自动与Internet时间服务器

时间服务器

保存配置

同步

(系统自带: ntp.ntsc.ac.cn ntp1.nj.gov.cn)

CPU/

Web

CPU

CPU

80%



CPU

80%

*

4008111000

<http://webchat.ruijie.com.cn>

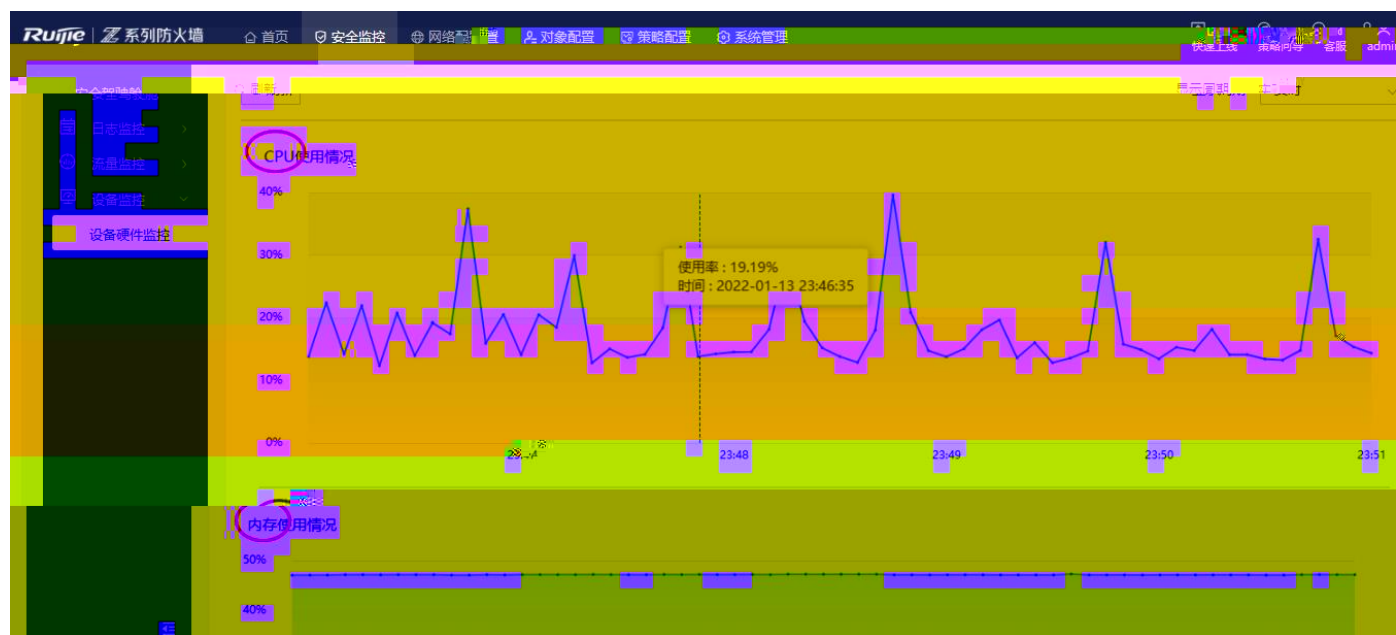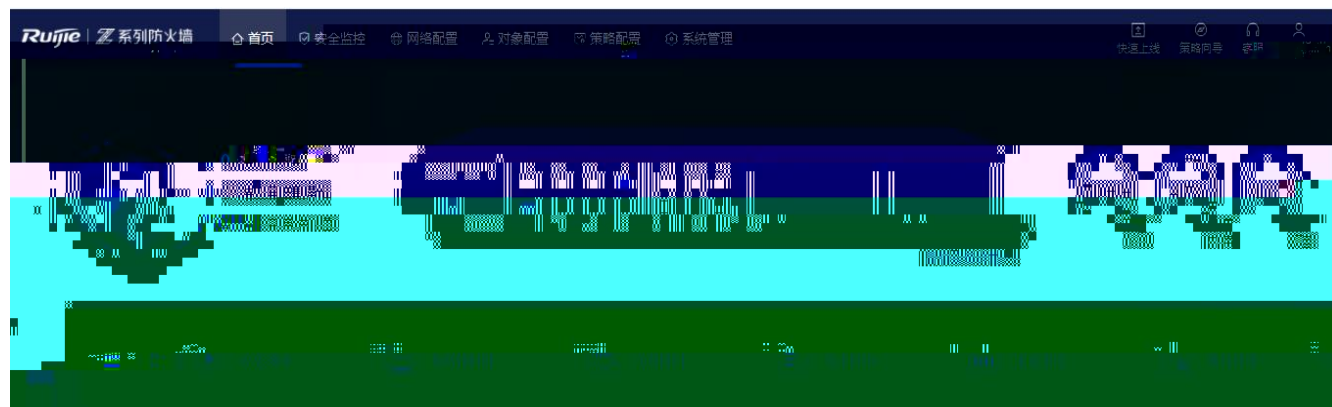



()



快速 策略向导 客服 admin 安全监控

安全驾驶舱 系统日志

日志监控

时间 详细信息 安全日志 安全级别 日志类型

2022-01-13 19:13:05 the current CPU usage is (89.98%) exceeds alarm thresh CPU Alarm

2022-01-13 19:13:05 the current CPU usage is (100.00%) exceeds alarm thres CPU Alarm

2022-01-13 19:13:05 the current CPU usage is (100.00%) exceeds alarm thres CPU Alarm

2022-01-13 19:12:55 the current CPU usage is (100.00%) exceeds alarm thres CPU Alarm

提示 CPU Alarm 2022-01-13 19:12:55 the current CPU usage is (100.00%) exceeds alarm thres hold 85%

提示 CPU Alarm 2022-01-13 19:11:35 the current CPU usage is (100.00%) exceeds alarm thres hold 85%


https
ping https

webui

The screenshot displays a web interface for configuring local protection. At the top, there are navigation tabs: "移动" (Move) and "本机防护" (Local Protection), with the latter being selected. A search bar is present with the placeholder text "请输入查询内容". Below this is a table with columns: "源安全区域" (Source Security Area), "源地址" (Source Address), "目的地址" (Destination Address), "服务" (Service), "动作" (Action), "描述" (Description), and "操作" (Action). The table contains one entry: "any" for source area, "any" for source address, "any" for destination address, "本地服务,icmp" for service, and "permit" for action. The description for this entry is "允许访问本机服务的流量,但限制每主机速率为每秒600个报文" (Allow access to local service traffic, but limit the rate per host to 600 packets per second). To the right of the table, there is a "本机防护" (Local Protection) section with buttons for "新增" (Add), "删除" (Delete), "启用" (Enable), and "禁用" (Disable). Below these buttons is a table with columns "优先级" (Priority) and "名称" (Name), containing one entry with priority "1" and name "limit_local". A green sidebar menu is visible on the right, listing various security features like "安全策略" (Security Policy), "策略配置向导" (Policy Configuration Wizard), "安全策略" (Security Policy), "策略优化" (Policy Optimization), "策略生命周期" (Policy Lifecycle), "端口扫描" (Port Scanning), "流量学习" (Traffic Learning), "NAT策略" (NAT Policy), and "安全防护" (Security Protection). At the bottom of the interface, there are buttons for "阻断所有" (Block All) and "ARP防护" (ARP Protection).

源安全区域	源地址	目的地址	服务	动作	描述	操作
any	any	any	本地服务,icmp	permit	允许访问本机服务的流量,但限制每主机速率为每秒600个报文	<input checked="" type="checkbox"/> 编辑

优先级	名称
1	limit_local

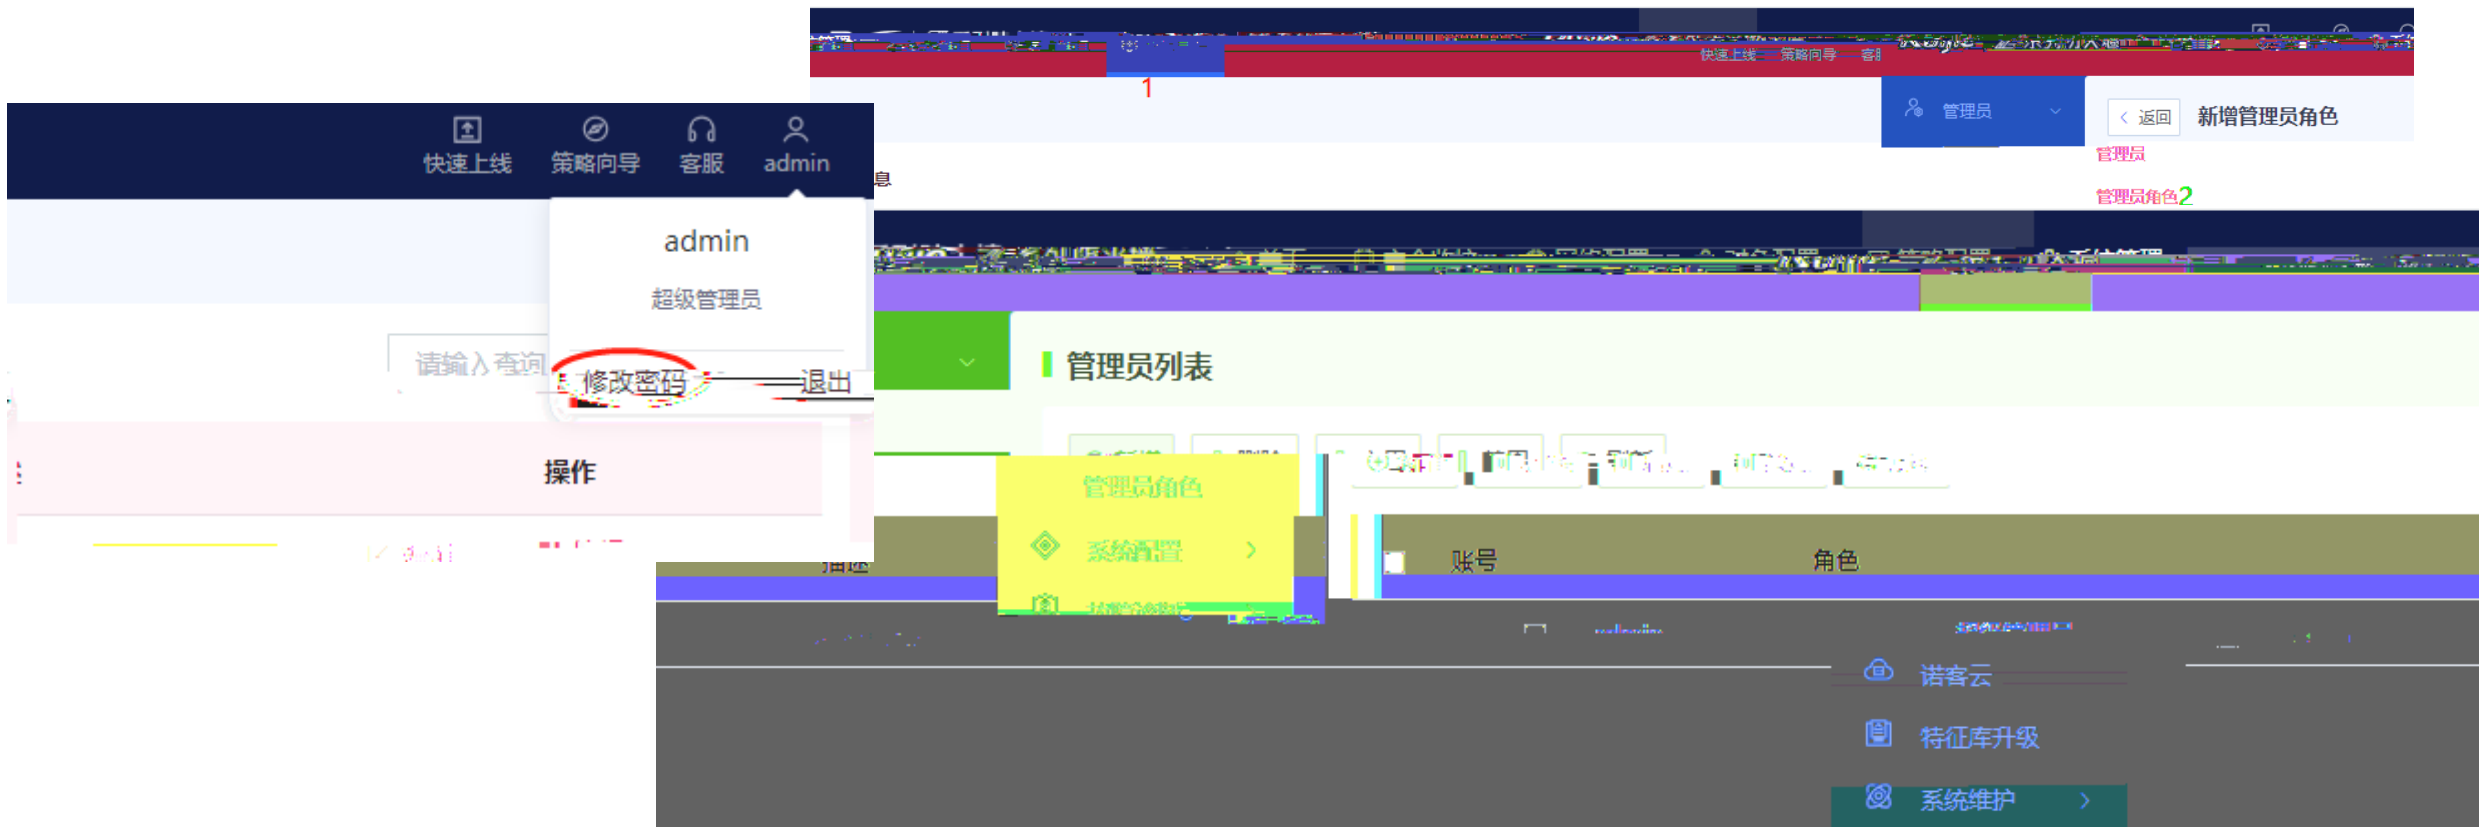


Ping

IP

Ping

Tracert

IP

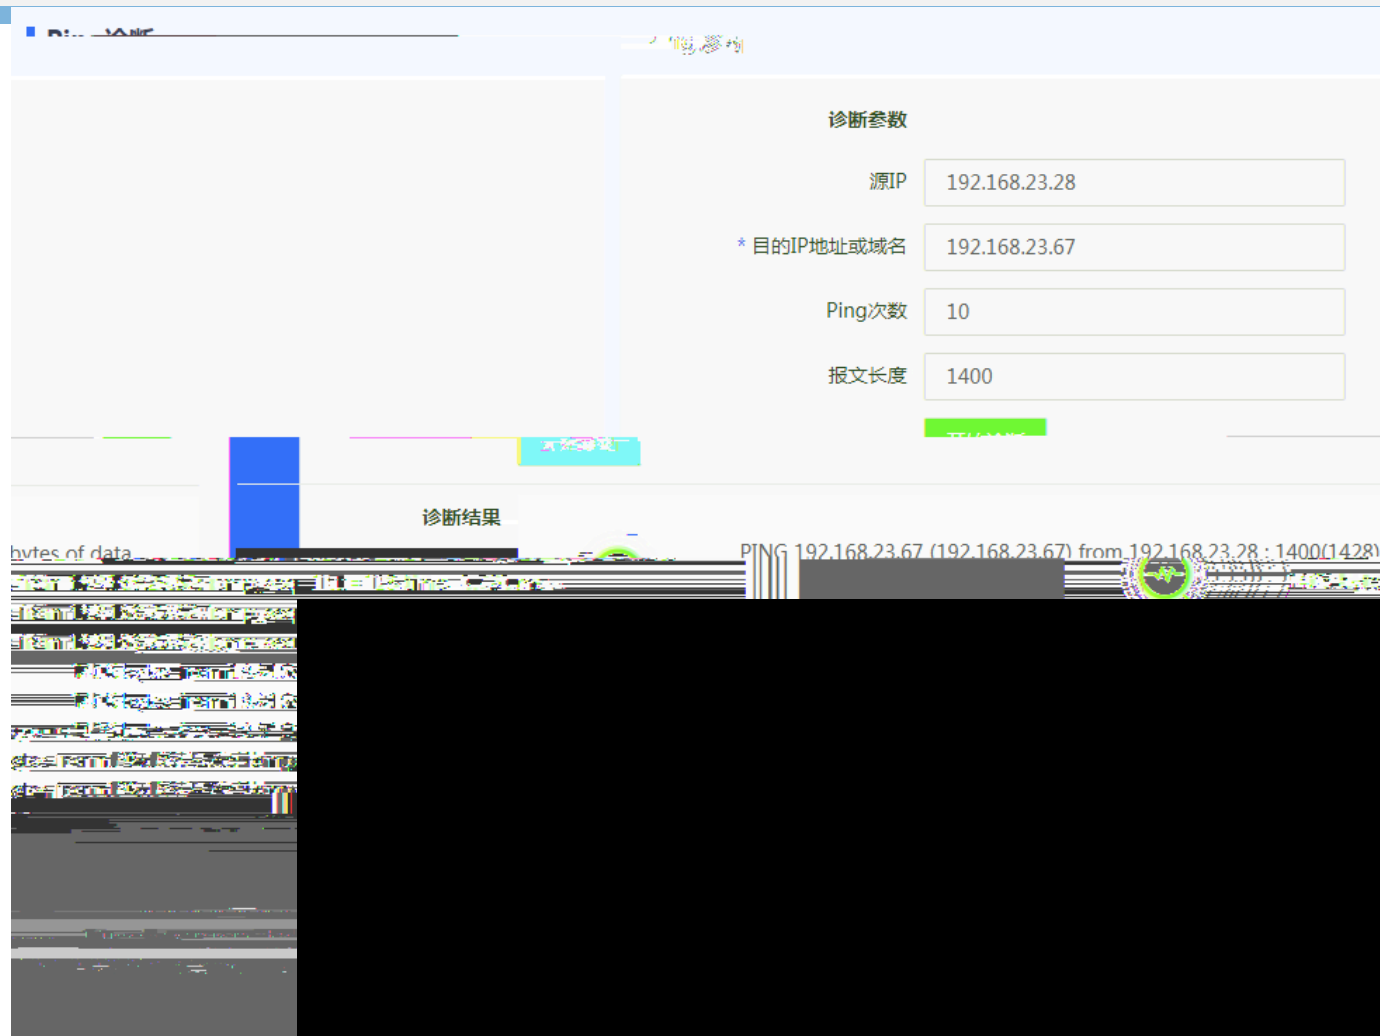



TCP UDP ARP
IP IP

MAC MAC

Reset Eweb

抓包选项

抓包规则

二层协议 any IP ARP

三层协议 any TCP UDP

源IP (端口)

目的IP (端口)

源MAC

目的MAC

源IP: 0-65535

目的IP: 0-65535

一键收集

① 一键收集完成, 请下载收集的信息或重新收集

最近一次收集时间 2022-01-07 13:25:43

[一键收集](#) [下载](#)



- 1.
- 2.
- 3.
- 4.
- 5.
- 6.



ping web

ping ssh , web

ping


ssh: ssh--> ssh ()

The screenshot displays a network security management interface. A table lists firewall rules with the following columns: 优先级 (Priority), 名称 (Name), 源安全区域 (Source Security Zone), 源地址 (Source Address), 目的地址 (Destination Address), 服务 (Service), 动作 (Action), and 描述 (Description). Two rules are visible:

优先级	名称	源安全区域	源地址	目的地址	服务	动作	描述
1	limit_local	any	any	any	本地登录 (Local Login)	permit	允许本地用户登录设备。 连接数与本地用户数一致。 3000个限制。
2	deny_all	any	any	any	any	deny	拒绝所有流量在本设备上。

A context menu is open over the table, showing options: 策略优化 (Strategy Optimization), 策略生命周期 (Strategy Lifecycle), 端口扫描 (Port Scanning), 流量学习 (Traffic Learning), 配置策略 (Configure Policy), NAT策略 (NAT Policy), 策略应用 (Policy Application), 策略删除 (Policy Deletion), and 策略重置 (Policy Reset). The '策略应用' option is highlighted with a red box.







- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.

firewall> show product

```

firewall> show product
show-product
start-time "2022-01-13 18:53:35"
uptime "4 hours, 33 minutes"
productname Z5100
hardwarever 1.00
...
softwarever m1240300.1132022
boot-version 1.1.0.f6bea6f3

```

firewall> show config

yang

show config vrf main interface physical

cpu

show cpu

show memory



```

firewall> show cpu
top - 23:32:22 up 4:38, 0 users, load average: 3.42, 3.44, 3.53
...
0.0/0.0 0[
0.0/0.0 0[
78.8/3.8 [
0.0/0.0 [

```

```

firewall> show memory
MemTotal: 4029480 kB
MemFree: 580988 kB
MemAvailable: 854524 kB
Buffers: 72644 kB
Cached: 391232 kB
SwapCached: 0 kB
Active: 574684 kB
Inactive: 261104 kB
Active(anon): 432580 kB
Inactive(anon): 29836 kB
Active(file): 142104 kB
Inactive(file): 231268 kB
Unevictable: 8408 kB
Mlocked: 9408 kB
...
Dirty: 470 kB
Writeback: 0 kB
AnonPages: 373336 kB
Mapped: 131464 kB
Shmem: 90520 kB
Slab: 93156 kB
SReclaimable: 55756 kB
SUnreclaim: 37400 kB
KernelStack: 4384 kB
PageTables: 4808 kB
NFS_Unstable: 0 kB
...

```

看得见的


firewall> show npf flows stats

```
firewall> show npf flows stats
The capacity of the flow: 1000000
Allocated flows num: 7
Active flows num: 7
firewall>
```

:show npf flows [expect] [filter {[saddr sip] [sport port][daddr dip][dport port]}

expect -

ALG

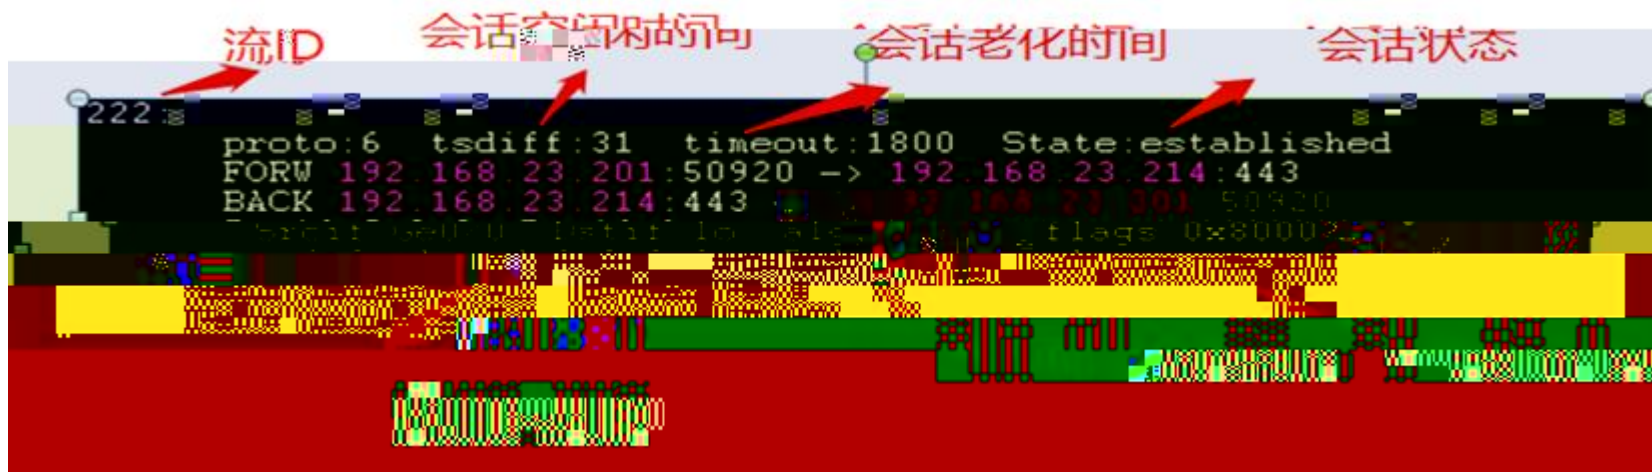




- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.



- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.






- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.

license

DNS

The screenshot displays a web management interface for a security system. The main content area is titled "特征库升级" (Feature Library Upgrade). Under the "设置自动更新" (Set Automatic Update) section, the "自动升级时间" (Automatic Upgrade Time) is configured as "每日 23 时 35 分" (Daily 23:35). Below this, there are two sections for feature libraries: "IPS特征库" (IPS Feature Library) and "应用识别特征库" (Application Identification Feature Library). The "IPS特征库" section shows a current version of 20211231.1831 and a last upgrade time of 2022-01-13 00:03:26. The "应用识别特征库" section shows a current version of 20221202 and a last upgrade time of 2022-01-13 00:03:45. At the bottom of the page, there are buttons for "在线升级" (Online Upgrade) and "本地升级" (Local Upgrade).

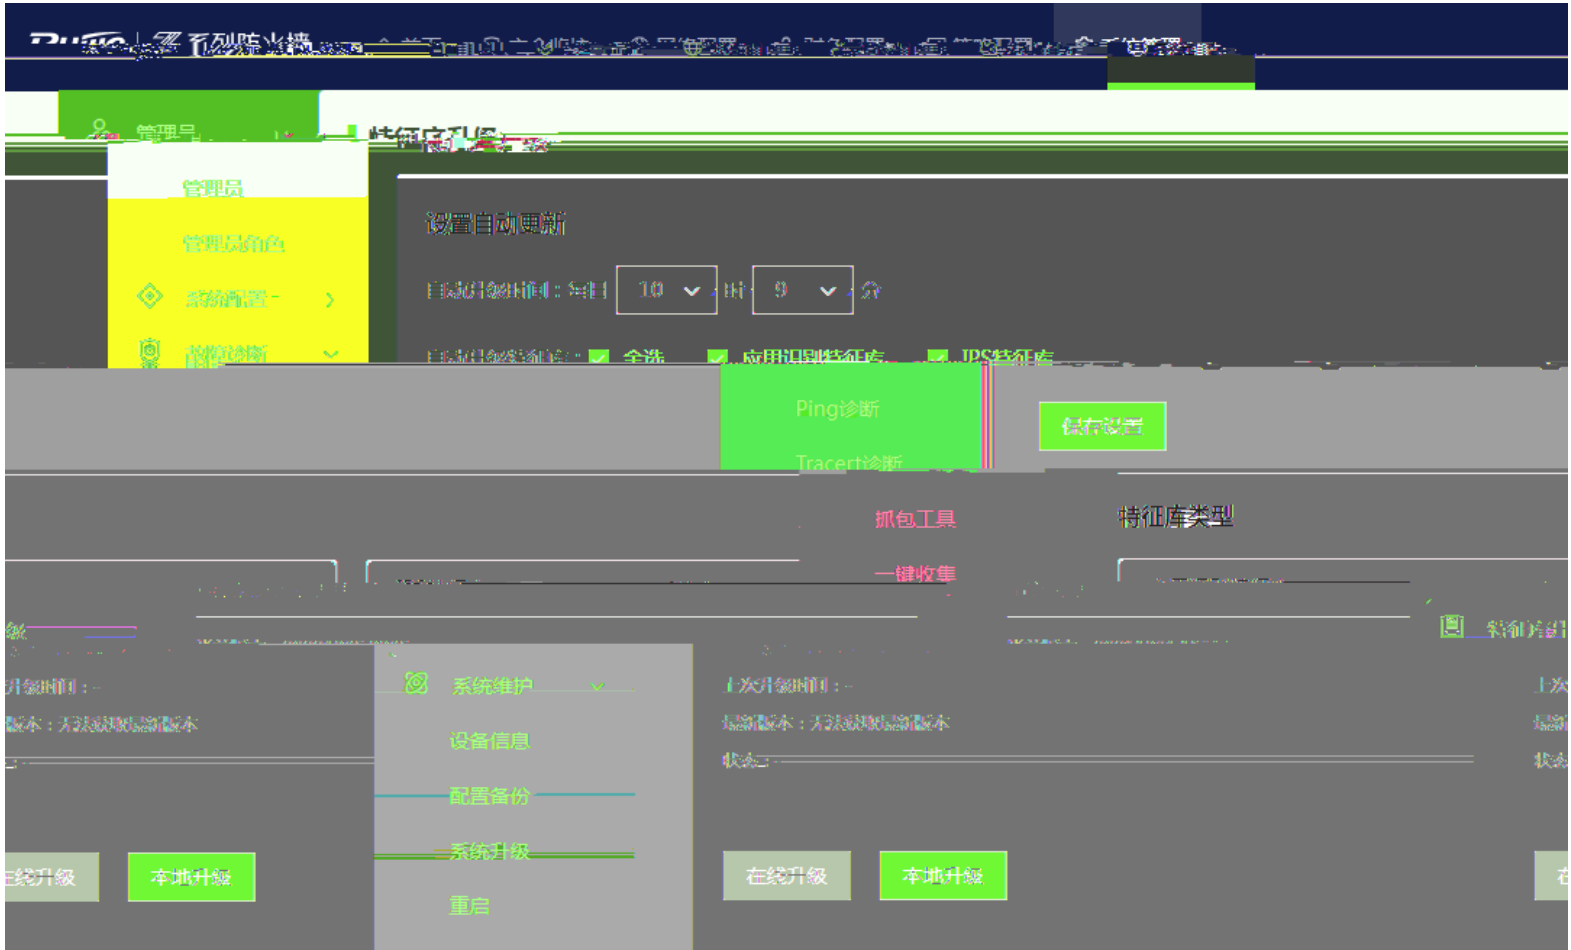



- 1.
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.

THANKS

29

100036

Office Tel: 010-51715999

Fax: 010-51413399

4008-111-000

www.ruijie.com.cn



A 11

