

RG-MF2920U

MF2920U_1.0(1)B1 WEB

V1.2

2022-03-18

copyright © 2022



-
-
-
-
-
-
-
-
-
-

<http://www.ruijie.com.cn>

<http://www.ruijie.com.cn/fw/>

7*24h

<http://ocs.ruijie.com.cn>

7*24h

4008-111-000

--

<http://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn



APP



1 Web

1.1

Web

Web

chrome

WEB



MF2920U

1.2

WEB	WEB
---------------------	-----

1.2.1 WEB



1. WEB PC
2. Google chrome 360 qq edge
WEB
3. 1600*900 1920*1080

1.3 WEB

1.3.1

IP IP ip 192.168.1.200 PC

 Ruijie **设备概况**
型号: RG-MF2920U-4GT1MS

设备端口状态 **设备端口状态** 重新获取设备端口状态 刷新

172.18.102.17

设备MAC 00:16:78:18:22:26

1F 1 2 3 4

序列号 LIN0955570119

1.3.3.3 POE /ARP

The screenshot displays a network management interface with two main data tables. The top table shows POE statistics: 总功率: 126 W (Total Power: 126 W) and 剩余功率: 126 W (Remaining Power: 126 W). Below this is a table with columns: MAC地址 (MAC Address), 端口 (Port), 端口 (Port), POE开关设置 (POE Switch Setting), 供电状态 (Power Status), 供电功率 (Power Consumption), and IP地址 (IP Address). The first row shows MAC address 00d0.f822.33b9 on port Gi02, with a power consumption of 0 W. The second table lists ports Gi01 through Gi05, all with POE switch settings set to '开启' (On) and power status set to '关闭' (Off), with a power consumption of 0 W for each. Summary statistics at the bottom indicate 共 9 条 (Total 9 items) for the first table and 共 1 条 (Total 1 item) for the second table.

MAC地址	端口	端口	POE开关设置	供电状态	供电功率	IP地址
00d0.f822.33b9	Gi02	Gi01	开启	关闭	0	172.29.15.1
		Gi02	开启	关闭	0	
		Gi03	开启	关闭	0	
		Gi04	开启	关闭	0	
		Gi05	开启	关闭	0	

- POE

POE < > POE

- ARP


ARP < > ARP

1.3.4

1.3.4.1


1.3.4.1.1


1.3.4.1.1.1

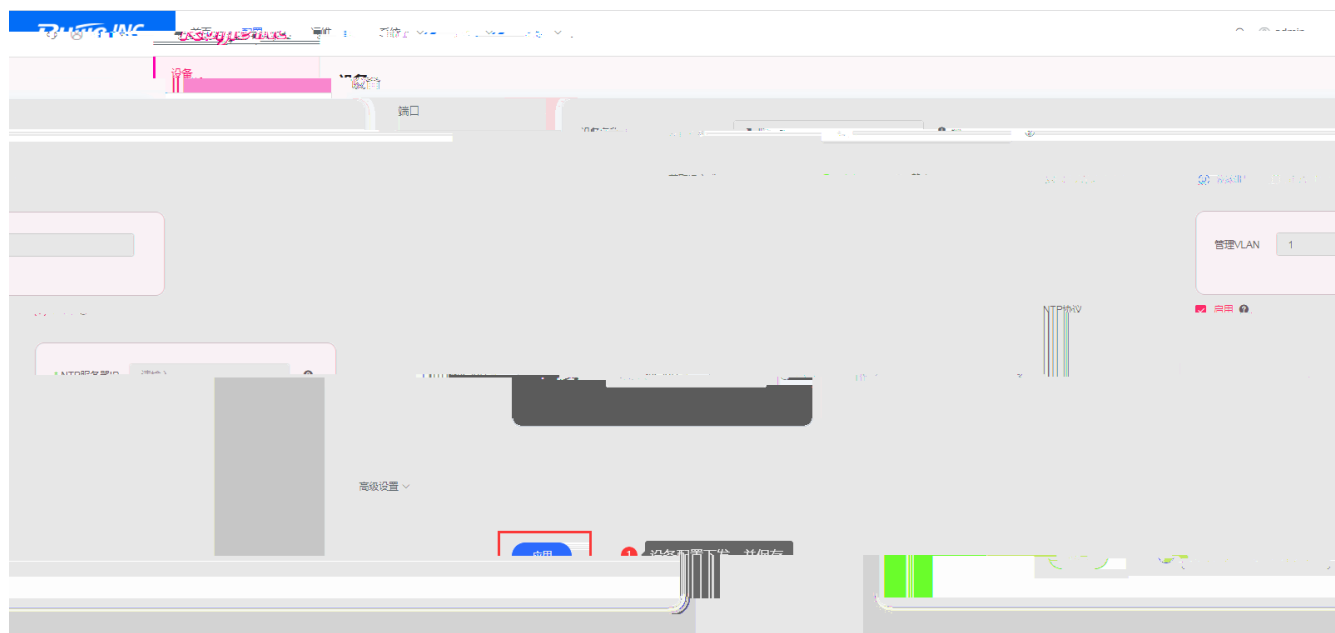



1.3.4.2





1.3.5

1.3.5.1

1.3.5.1.1 Ping

Ping IP < >



```
Sending 5 ICMP Echoes to 172.29.15.1, timeout is 2000 milliseconds:  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 2 ms  
ping: recv 172.29.15.1 2 ms  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 0 ms  
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/2 ms
```

检测后的内容

1.3.5.1.2



_20220118182247.txt

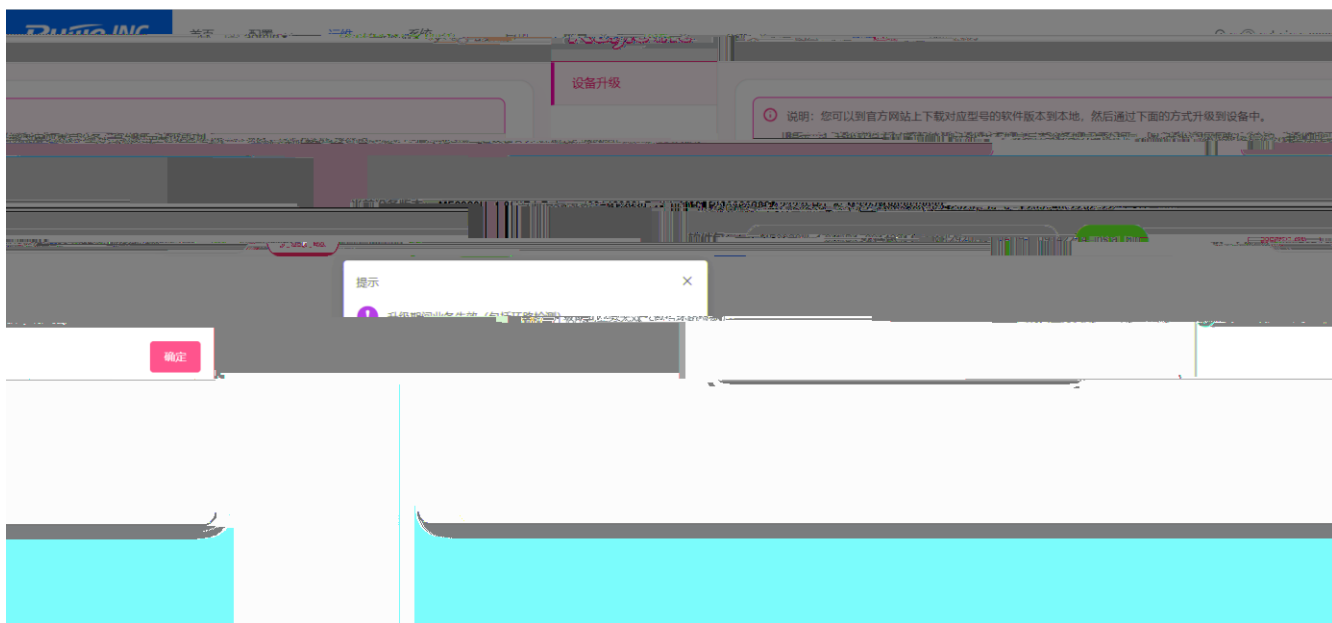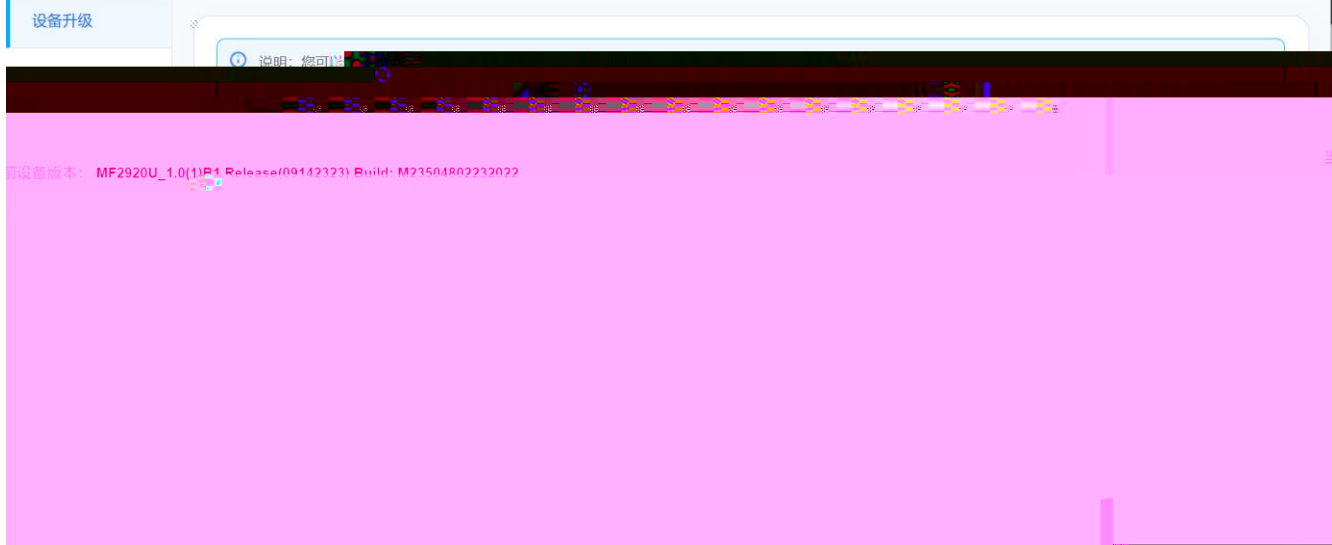

1.3.5.2.3 Boot



boot

1.3.5.3

1.3.5.3.1

1.3.5.3.1.1



●



1.3.5.3.1.2



- < >
- < >

1.3.5.3.2

2-3




```
Ruijie(diag)ping 192.168.193.1
Sending 5, ICMP Echoes to 192.168.193.1, timeout is 2000 milliseconds:
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 0 ms
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/1 ms
Ruijie(diag)#
```