





III

2015

RG-AP880-A

802.11ax

AP

2.4G

0.575Gbps

5G

7.2Gbps

7.775Gbps

RG-AP880-A

RG-AP880-A

802.11ax

802.11ac

802.11n

RG-AP880-A

”

AP

5GBase-T/2.5GBase-T/1000Base-T

”

PoE DC54V

”

”

Fit Fat

”

ibeacon

802.11ac 256-QAM
1024-QAM,

25%

12.95W PSE 48V
PoE





III

2015

		AP
		AP
		AP Link Down
	3 1	FITAP AP AC CAPWAP
	0.2 0.2	FITAP MACCAP AP
		AP
	1 1	AP
	0.2 0.2	FITAP AP AP



III

2015




WLAN-BAND-OP
TIMIZE-SCG.doc



III

2015

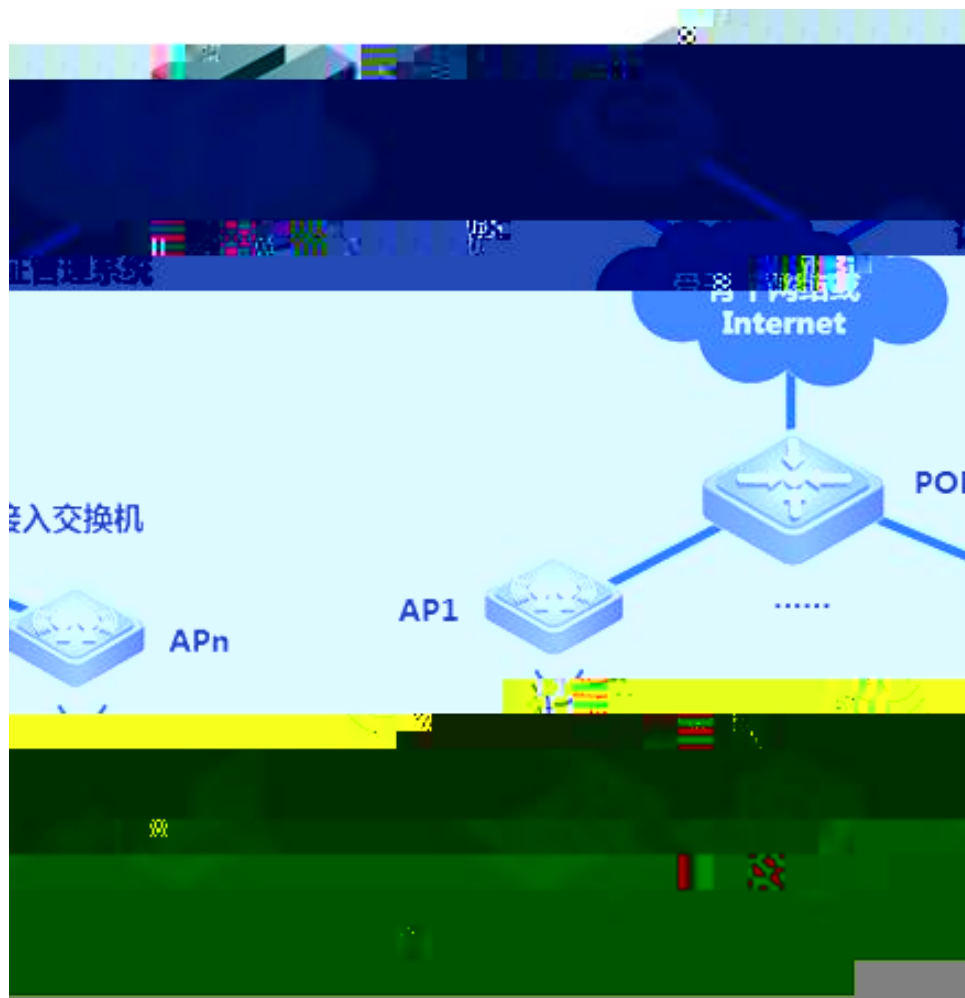



III

2015

