



PPT

RG-AP180-SF

PPT

RG-AP180-SF

RG-AP180-SF

RG-AP180-SF

RG-AP180-SF



3.0 AP

AP180-SF

AP




802.11n

2.5G


4*1G

2.4G+5G

802.11ax 802.11ac wave2/1








AP_RGOS 11.9(6)W3B5, Release(10150314)

```
Ruijie#show ver detail ↓
System description      : Ruijie AP180-SF (802.11a/n/ac/ax and 802.11b/g/n/ax) By Ruijie Networks. ↓
System start time       : 1970-01-01 00:00:00 ↓
System uptime           : 0:00:01:14 ↓
System hardware version : 1.00 ↓
System software version : AP_RGOS 11.9(6)W3B5, Release(10150314)
System board type       : R180
System hardware version : 1.00 AXE 180R
System software version : 11.9(6)W3B5, Release(10150314)
System boot mode        : normal
System boot device      : flash
```

	RG-AP180-SF	RG-MAP852-SF
	86mm×160mm×32.5mm	86mm×160mm×32.5mm



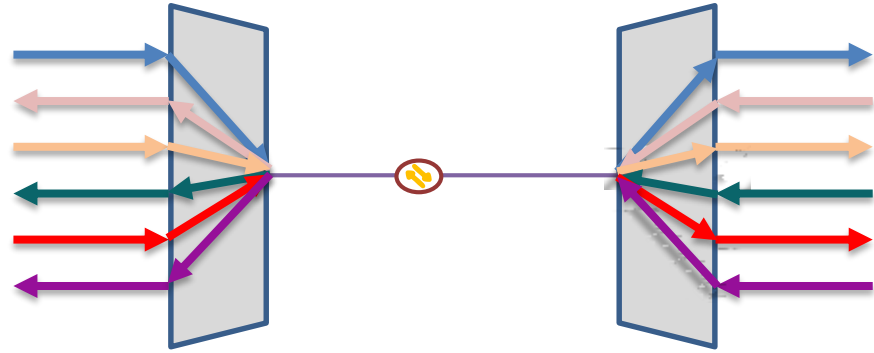

MUX/DEMUX

MUX/DEMUX



WDM

POL

(TDM)

TDM

WDM

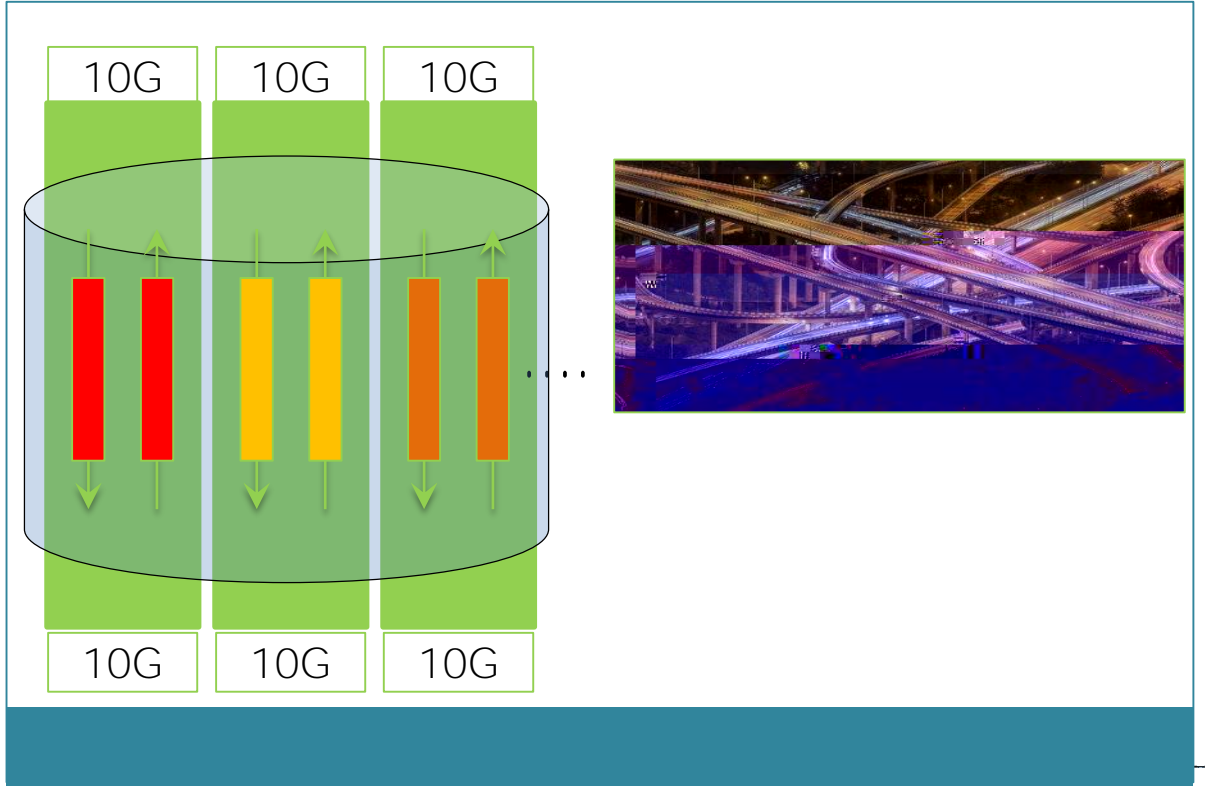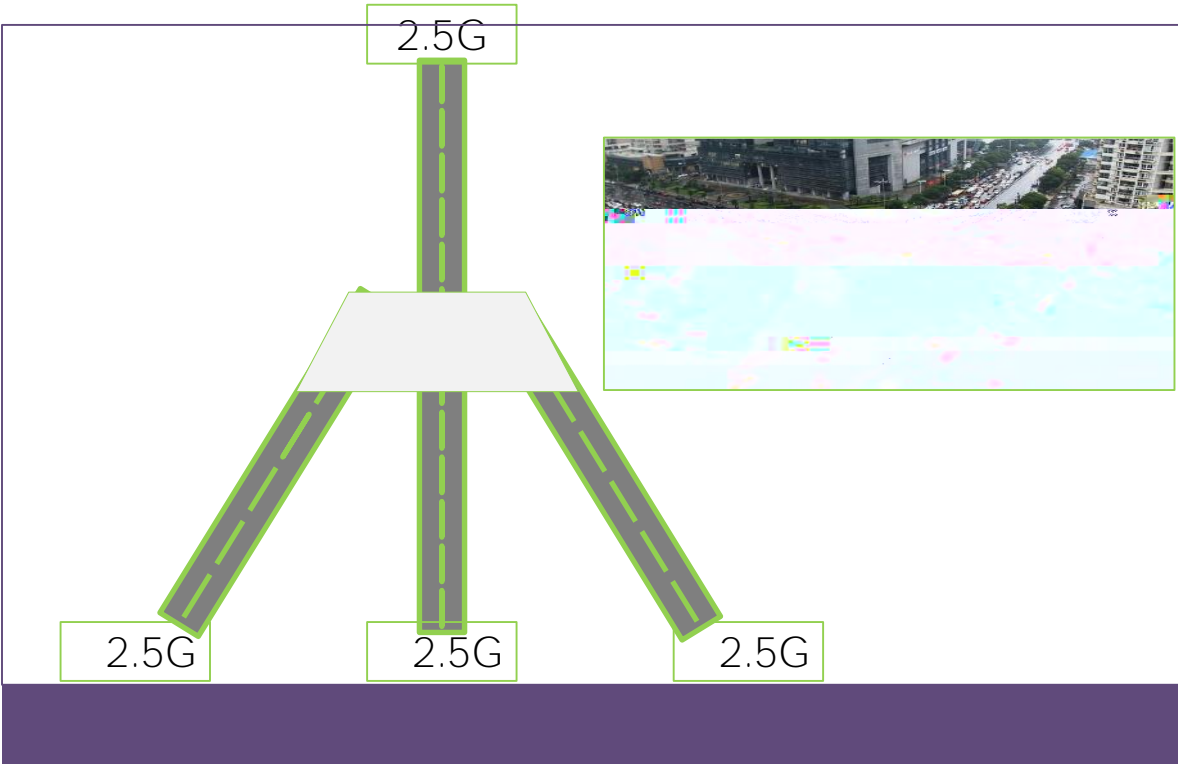



RX power

- 1.
- 2.

AP

ODF

AP

```
am5552-sf-2#  
am5552-sf-2#show int tr d  
Running this command on a device may take some time to complete.  
-----  
Interface GigabitEthernet 0/0/0/0  
-----
```

AP

40-56V

AP RG-MAP852-SF RG-MAP852-



AP180-SF

RG-DC4805-BA

G.657 A2

AP

1 2.5G

2.5G 1G

PPT

THANKS

29

100036

Office Tel: 010-51715999

Fax: 010-51413399

4008-111-000

www.ruijie.com.cn



A 11

