





RG-DBS

V3.0.2

©2008





Arial

[] []

{ x | y | ... }

[x | y | ...]

//

1.

1+ 2 Ctrl+Alt+A
“ Alt ” “ A ”

1+ 2 Ctrl+Alt+A “ Ctrl ”

1	2	Alt
---	---	-----

1	2	Alt	F	Alt
---	---	-----	---	-----



RG-


2ip

IP IP ETH1
ETH0 IP ETH1 IP 172.16.0.254
255.255.0.0


IP IP ETH1 IP
IP windows xp



putty.exe ssh IP
system system



help network

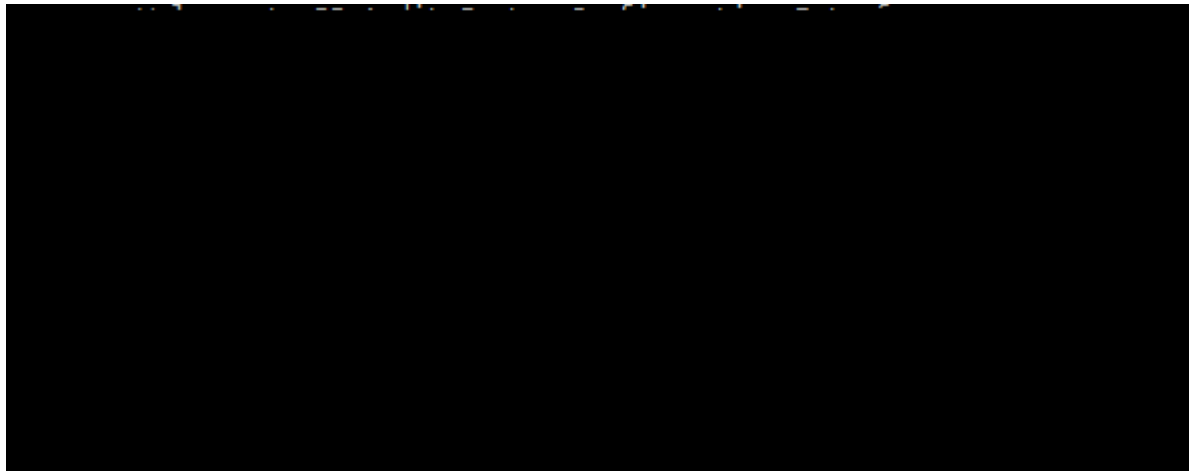

IP

“

2.1

network”


3

IE (IE7 IE6) http:// IP
IP IP <http://192.168.1.254>
IP 192.168.1.254
255.255.255.0
192.168.1.1
IP 172.16.0.254
255.255.0.0



RG-


4

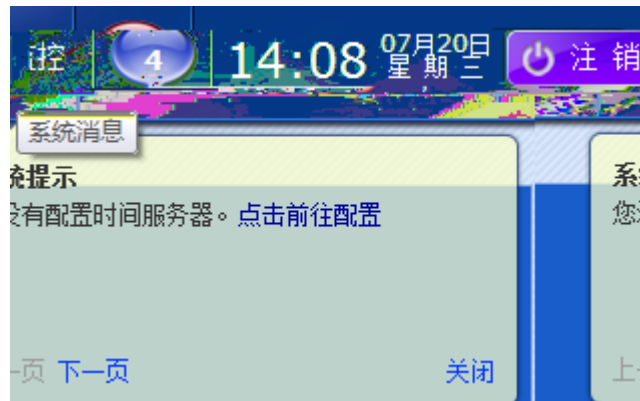

4.1

sysadmin

“ -> ”

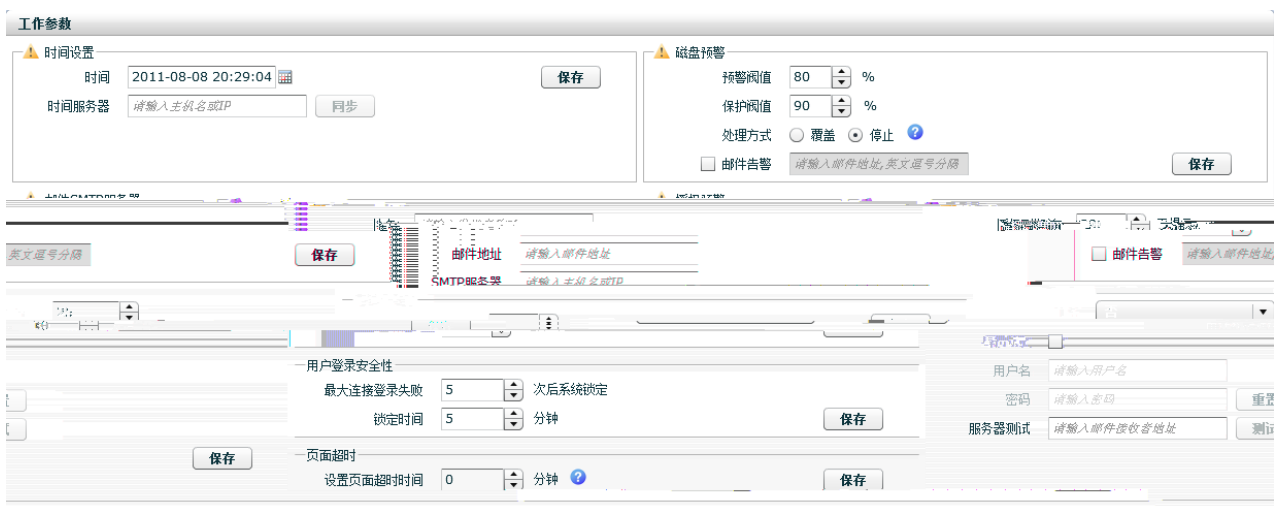

4.1.1

“ ” “ ”

』



“ ” “ ”

4.1.3

“ ” “ ”

%

80% 50-89%

%

90% 50-98%

“ ”

磁盘预警

预警阈值 80 %

80% 50-89%

保存

☒

test@abc.com

80%

test@abc.com

90%

4.1.4

—授权预

100



天提示


test@abc.com

4.2


“

”

ó



INSERT SELECT UPDATE

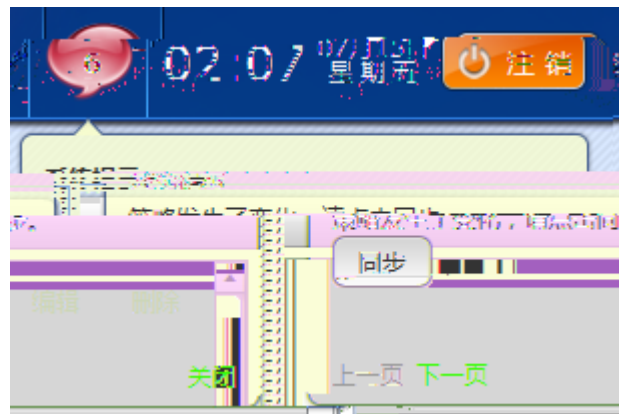

“ ”

“ ”

4.3

审计WEB中间件设置


	名称		描述	
	IP	192.168.0.100		
	端口	80		




IP 192.168.0.100 80 WEB

IP URL



WEB

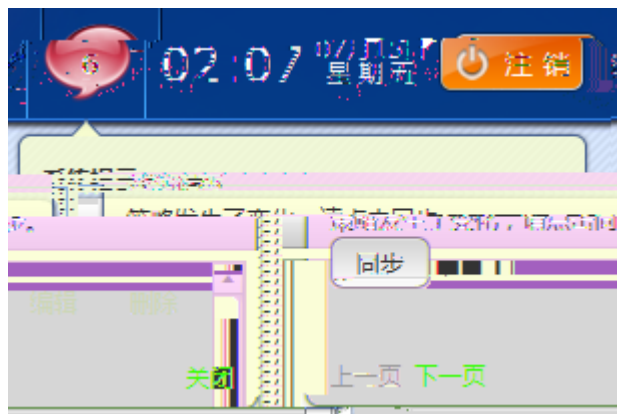

5

5



策略设置

策略名称 *

策略状态 ☒ 开启

策略描述

事件类型 请选择...

风险级别 无 低 中 高

时间规则

来源设置

任意 自定时间

任意 自定来源

请选择...

配置

所选时间外

配置

所选来源外

动作规则

任意 自定

操作类型 请选择...

策略应用于

bhv

操作结果 ☐ 成功

耗时超过

影响行数超过

异常串

内容规则 请选择...

失败 未加

毫秒

行

个, 用, 分

配置资产

配置数据库服务器

取消 全部重置

保存

“ ”

来源设置

任意 自定来源

请选择...

所选来源外

配置

1. “ ”

2. “ ” “ ” “ ”

3. “ ”

“ ” “ ” “ ” “ ” SQL
“ ”

策略应用于

☒ db2-0.106

配置数据库服务器组

资产组

未知资产组

请选择...

资产组

数据库服务器组 资产组 未知资产组

请选择...

1. “


” 4.2

2. “ ”


“ ”

5.3

3. “ ” “ ” “ ” “ ”

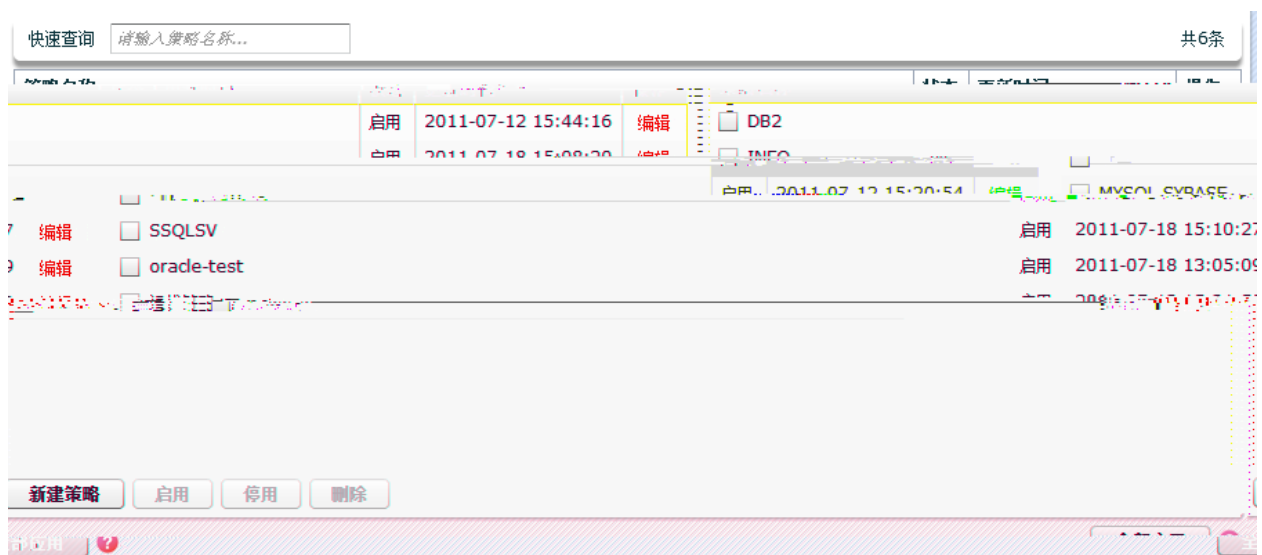


“ ”

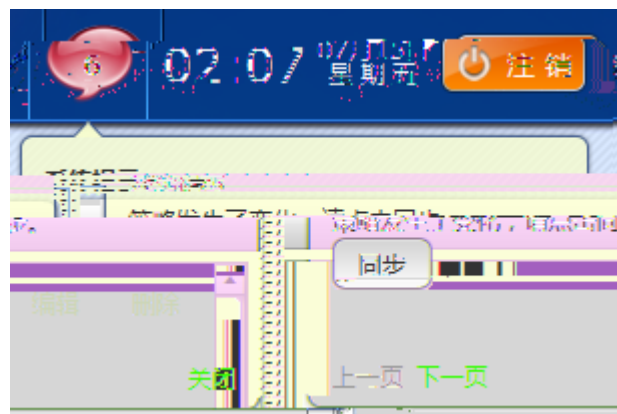

“ ” “ ”

5.3

“ ”

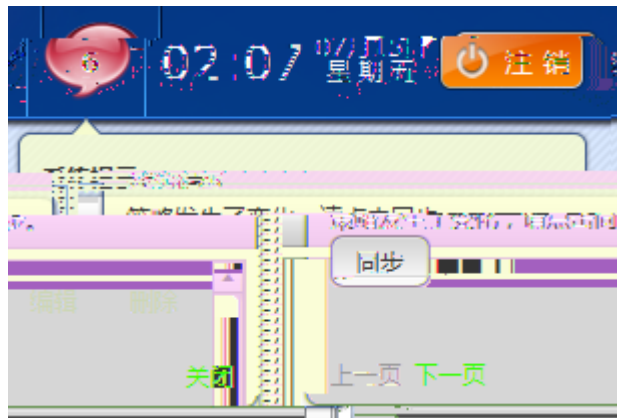

“ ”

“ ”

“ 5 ”

“ FAQ ”